



HASP Student Payload Application for 2018

Payload Title: Measurements of Good and Bad Ozone.			
Payload Class: (circle one) Small Large		Institution: University of North Florida (UNF) And University of North Dakota	
		Submit Date: 12-14-2017	
Project Abstract:			
<p>UNF-UND team have successfully flown payloads on the NASA-HASP balloon flights since 2008 and measured the ozone gas profile in the stratosphere. Based on the success and experience of previous flights and observation of interesting larger ozone peak in troposphere after termination of HASP2017 flight, the UNF-UND team proposes the HASP 2018 flight for the development of new improved version of ozone sensors and payload to measure good ozone profile in the stratosphere and bad ozone in the troposphere. In addition, we will explore the measurements of nocturnal ozone maxima before launching of the flight during early morning as well as in the troposphere after termination of flight at night time. Three different types of ozone sensors boxes made by three different types of materials will be mounted on the three sides of rectangular payload body. Each sensor box will have 8 ozone gas sensors array. Ozone gas sensors will be fabricated and calibrated by the students' team at UNF and will also tested at UND. The UV light photodiode will be mounted just below ozone gas sensors box to measure amount of photovoltage generated by UV light, which will support the science concept of generation of ozone gas in the presence of UV light. This proposed HASP2018 flight science experiment will help us understanding good ozone in stratosphere, bad ozone in troposphere and any possible observation of higher concentration of ozone due to nocturnal ozone maxima after termination of flight at night time.</p>			
Team Name: Ozone Sensors		Team or Project Website: N/A	
Student Team Leader Information:		Faculty Advisor Contact Information:	
Name:	Jesse Lard (Leader)	Dr. Nirmalkumar G. Patel	Dr. Ronald Fevig
Department:	Physics	Physics	Space Studies
Mailing Address:	University of North Florida Building #50 1 UNF Drive	University of North Florida Building #50 1 UNF Drive	University of North Dakota Clifford Hall, Room 512 4149 Uni. Ave Stop 9008
City, State,	Jacksonville, FL 32224	Jacksonville, FL 32224	Grand Forks, ND 58202
Email:	jesselard@gmail.com	npatel@unf.edu	rfevig@space.edu
Office Phone:	904-620-1670	904-620-1670	701-777-2480
Cell Phone:	850-348-3510	904-200-2855	520-820-3440
FAX:	904-620-1989	904-620-1989	701-777-3711

HASP2018 Proposal

Measurements of Good and Bad Ozone

Submitted by



University of North Florida (UNF) and University of North Dakota (UND)

UNF Students Team:

Jesse Lard (Leader),
Zachary Taylor
Corrina Yorke
Devon Cox

UND Students Team:

Denise Buckner
Fnu Anamika
Peter Henson

Faculty Advisors:

Dr. Nirmalkumar G. Patel (UNF)
Dr. Ronald A. Fevig (UND)

Proposal Index

Section	Contents	Page
1	Project Summary	4
2.1	Good Ozone, Bad Ozone, Ozone Hole, and Nocturnal Ozone	5
2.2	Significant of Ozone Sensors	8
3	Work Plan for the Proposed Science Experiment	8
3.1	Previous HASP 2017 flight	8
3.2	Proposed work plan	12
3.3	Fabrication of Gas Sensors Arrays	15
3.4	Working Principle of Gas Sensors	17
3.5	Mechanical Specifications of Payload	18
3.6	Payload Mounting Footprint	30
3.7	Desired location and orientation of payload on HASP	30
4	Electronic circuits	31
5	Payload Power Budget	34
6	Thermal Stability of the Payload	38
7	Data Communications	39
8	Steps for Measurements of Ozone	42
9	UNF–UND Team and Demographic Information	44
10	Task and Work Plan Path	45
11	HASP Integration and Launch	46
12	Anticipated Procedures	47
13	Financial Considerations	47
14	References	48

1. Project Summary

UNF-UND team have successfully flown payloads on the HASP balloon flights since 2008 and measured the ozone gas profile in the stratosphere. Based on the success and experience of previous flights and observation of interesting larger ozone peak in troposphere after termination of HASP2017 flight, the UNF-UND team proposes the HASP 2018 flight for the development of new improved version of ozone sensors and payload to measure good ozone profile in the stratosphere and bad ozone in the troposphere. In addition, we will explore the measurements of nocturnal ozone maxima before launching of the flight during early morning as well as in the troposphere after termination of flight at night time. This proposed HASP2018 flight science experiment will help us understanding good ozone in stratosphere, bad ozone in troposphere and any possible observation of higher concentration of ozone due to nocturnal ozone maxima after termination of flight at night time. The output of the proposed payload will help us for the development of free flying small gas sensors payload instrument for meteorological weather balloon, rocket or sub orbital space vehicle and may be used at Antarctica for the long duration of balloon flight.

New version of 8 Nanocrystalline Indium Tin Oxide (ITO) thin film gas sensors will be used to detect ozone gas. In addition, 8 newly developed nanocrystalline alpha phase of silver tungstate (α - Ag_2WO_4) thin film gas sensors will be used to detect ozone gas. Improved version of 8 nanocomposite In_2O_3 +ITO thin film gas sensors will be used for detection of bad ozone in pollutant gases and smog in the atmosphere and troposphere. The operating temperature of all gas sensors will be maintained constant at 305 ± 4 K using a temperature control circuit. Three sensors boxes will be mounted on the three sides of rectangular payload body. Ultra violet photodiode will be mounted just below ozone gas sensors box in order to measure amount of photovoltage generated by UV light, which will support the science concept of generation of ozone gas in the presence of UV light. This science concept will help us understanding the effect of any dark shadow on the gas sensors, particularly at the time of sunset and also how much ozone gas concentration decrease at the night time. In addition, a temperature sensor to measure the temperature, new pressure sensors to measure the low pressure. The tested GPS will measure the altitude throughout the flight without any blockage of transmission. GPS antenna will be mounted outside of the payload for the better performance. Payload data communication will be performed by the HASP communication link. Measured data will be monitored in real-time mode and converted into the plots by the LabVIEW software program. The in house developed software based on JAVA will also allow us to convert RAW files directly into one EXCEL file.


Gas sensors will be fabricated, tested and calibrated with ozone gas in the low pressure chamber at UNF and also tested at UND. Then, gas sensors and other transducers will be integrated with the electronics circuit and software to complete the payload. The developed sensor payload will meet all the requirement of the HASP such as weight, size, power, communication and thermal

vacuum test for the balloon flight. Furthermore, the surface topography of the sensors before and after the flight will be studied using a scanning electron microscope (SEM), and the chemical composition of the surface of the sensors will be analyzed by an energy dispersive analysis of x-rays (EDAX) at UNF. This student project may be supported by both Florida and North Dakota Space Grant Consortia.


2.1 Good Ozone, Bad Ozone, Ozone Hole, and Nocturnal Ozone

Good Ozone


Generation of Ozone in the Stratosphere: Oxygen gas (O_2) is present in the atmosphere. High energy or shorter wavelength UV light ($h\nu$) collides with the oxygen molecule (O_2), causing it to split into two oxygen atoms. These atoms are unstable, and they prefer being "bound" to something else. The free oxygen atoms then smash into other molecules of oxygen, forming ozone (O_3).



The overall reaction between oxygen and ozone formation is:



The ozone is destroyed in the process that protects us from UV-B and UV-C rays emitted by the Sun. When ozone (O_3) absorbs UV light ($h\nu$), it will split the molecule into one free oxygen atom (O_1) and one molecule of oxygen gas (O_2). Thus, absorption of UV-B and UV-C leads to the destruction of ozone



Ozone is valuable to us because it absorbs harmful UV radiation during its destruction process. A dynamic equilibrium is established in these reactions. The ozone concentration varies due to the amount of radiation of light received from the sun.

Bad Ozone

Generation of Ozone in the Troposphere: Ozone in the troposphere is bad. This ozone is contributing to the smog and greenhouse gases created by human activities. Ozone close to the ground surface does not exist in high enough concentrations to shield us from UV light.

Formation of tropospheric ozone

- involved are: VOC (RH), OH (hydroxyl radical), NO_x , M (inert body, N_2 , or O_2); O_3 can be dissociated by UV and will form two OH \rightarrow chain process
- VOC and NO_x concentrations control ozone concentrations in a complicated way
- O_3 formation is probably NO_x limited, rather than VOC

The formation of tropospheric ozone required:

- VOCs: volatile organic compounds: mostly emitted by motor vehicles, vegetation, industrial, and commercial, dry cleaners, paints

- NO_x: nitrogen oxides, motor vehicles, power plants, industrial facilities, biomass burning, lightning
- Sunlight, higher temperature and low wind speed

Tropospheric ozone affect the meteorology

- higher O₃ concentrations can be found in the summer during dry high pressure conditions
- during inversions (warm air above cooler air) pollutants often get trapped resulting in high ozone concentrations and form nocturnal ozone maxima at night time.

Tropospheric, or ground-level ozone, is the major ingredient in smog and continues to pose a health risk.

- ozone attacks cells and breaks down tissue
- decreased ability to breathe, coughing, increased susceptibility to respiratory diseases such as pneumonia and bronchitis
- increased sensitivity to allergens
- long-term exposure may result in permanent lung damage
- according to EPA, about 15,000 Americans die every year from exposure to air-borne pollutants, and exposure to ozone causes hundreds of thousands of acute asthma
- ozone is a plant toxin, enforced by presence of SO₂ and NO_x
- ozone also damages materials such as nylons, rubber, and certain fabrics
- economic impacts
- damage of agricultural crops, forests, and wilderness areas
- Lowering of ozone levels by 25% may increase US crop yield by \$0.5 to 1.0 billion per year.
- natural tropospheric ozone concentration: 10 ppb

In establishing the 8-hour standard, EPA is setting the standard at 0.08 parts per million (ppm) and defines the new standard as a "concentration-based" form, specifically the 3-year average of the annual 4th-highest daily maximum 8-hour average ozone concentrations.

Ozone Hole

The criticality of ozone layer can be understood from the fact that, only 10 or less of every million molecules of air is ozone. The majority of these ozone molecules reside in a layer between 10 and 40 kilometers above the surface of the Earth known as stratosphere. Each spring in the stratosphere over Antarctica (spring in the southern hemisphere is from September through November.), atmospheric ozone is rapidly destroyed by chemical processes. As winter arrives, a vortex of winds develops around the pole and isolates the polar stratosphere. When temperatures drop below -78°C, thin clouds form of ice, nitric acid, and sulfuric acid mixtures. Chemical reactions on the surfaces of ice crystals in the clouds release active forms of CFCs. Ozone depletion begins, and the ozone "hole" appears. About 50% of the total column amount of ozone in the atmosphere disappears during two to three months. At some levels, the losses

approach 90%. This has come to be called the Antarctic ozone hole. In spring, temperatures begin to rise, the ice evaporates, and the ozone layer starts to recover. Thus, ozone “hole” is a reduction in concentrations of ozone high above the earth in the stratosphere. The ozone hole is defined geographically as the area wherein the total ozone amount is less than 220 Dobson Units. The ozone hole has steadily grown in size and length of existence over the past two and half decades. Now, the size of ozone hole over Antarctica is estimated to be about 30 million sq. km. It has been observed that, man-made chlorines, primarily chloroflourocarbons (CFCs), contribute to the thinning of the ozone layer and allow larger quantities of harmful ultraviolet rays to reach the earth.

Nocturnal Ozone

The observed higher concentration of ozone at night time due to nocturnal ozone maxima observed in ozone episode areas as a bad ozone can be correlated with vertical mixing of remnant daytime boundary layer. This mixing is forced by an increase in wind speed above the nocturnal surface inversion (fig 1 (a)). Samson [1] proposed that this process not only explains nighttime increases in ozone concentrations at lower altitude and process responsible for the reversed diurnal ozone fluctuations at higher altitude. Numerous investigators [2-3] have shown that higher ozone concentration occur on the back side of surface high pressure systems where the air, circulating poleward, has above average dry-bulb and dew point temperatures.

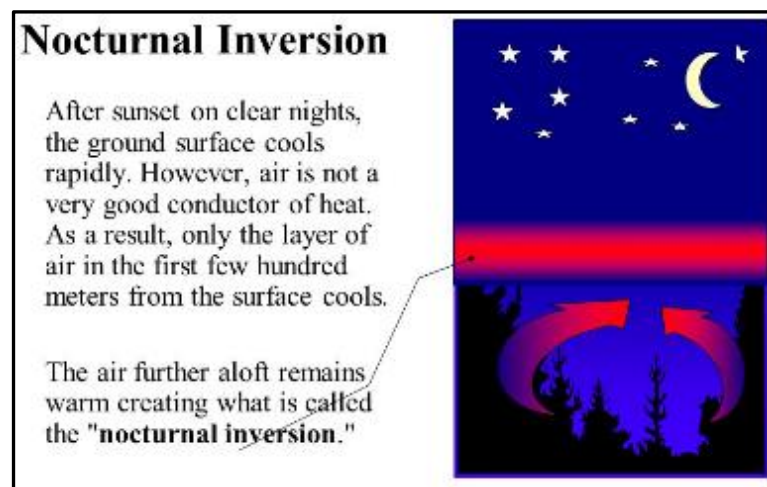


Fig. 1 (a) Formation of Nocturnal Ozone

Courtesy: <http://slideplayer.com/slide/5314464/>

Looking into this global issue of bad ozone and ozone depletion, we are working on the development of ozone sensors and low weight sensors payload to measure the ozone profile in the stratosphere on the real time mode using the HASP balloon flight since 2008. The purpose of low cost and miniature nanocrystalline thin film ozone sensor is to substitute the conventional tools such as bulky and expensive Dobson spectrophotometer, light detection and ranging (LIDAR), Satellite ultraviolet backscatter, Ozonesondes and electrochemical based sensors.

2.2 Significance of Ozone Sensors

Nanocrystalline oxide semiconductor thin films gas sensor arrays technology (U. S. Patent No. 9,606,078) and ITO-QCM (Quartz Crystal Microbalance) sensor platform technology (U.S Patent No. 7,930,923 B2) are developed by Dr. Patel at the University of North Florida (UNF) for the detection of toxic gases, explosive materials and chemical warfare agents with support of the Edgewood Chemical Biological Center, US Army Laboratory, APG, and the U.S. Department of Defense. Nanocrystalline gas sensors have also been used for the detection of ozone gas in the stratosphere. Nanocrystalline indium tin oxide (ITO) gas sensors were successfully first time tested and calibrated with ozone gas at the Kennedy Space Center (KSC) and at the UND during 2008-2009 [4]. UNF team is improving the performance of ozone sensors by changing its fabrication conditions and modifying its surface structure every year after HASP balloon flight. These sensors were successfully tested on HASP 2008 to 2017 flights. We have made step by step improvement of sensors, hardware, and software every year. UNF ozone sensors were also used by the students of Louisiana State University, University of Central Florida, Iowa State University and Taylor University for their weather balloon projects.

The proposed development and fabrication of different types of gas sensors and payload have several unique features. ITO gas sensor arrays have higher sensitivity and stability because of the nanocrystalline thin film structure. Earlier reported work on tungsten oxide sensors for the detection of ozone gas [5] required a high operating temperature of about 450°C to detect ozone, while the UNF developed nanocrystalline ITO sensors arrays operate at the room temperature and do not require a heater, which ultimately saves power requirements and space, and also minimizes the possibility of an accidental fire. The UNF developed alpha phase of silver tungstate thin film gas sensors have better sensitivity and selectivity for detection of ozone gas at low pressure, while nanocomposite In_2O_3 +ITO thin film gas sensors have better selectivity for detection of ozone in pollutant gases and smog. UNF developed gas sensors arrays are very small in size, have low weight and low power consumption, which meets the payload requirements for the space applications. These gas sensors can easily be integrated with microcontroller electronic circuits. Compared to the conventionally costly spectroscopic and other reference methods for the detection of ozone, our gas sensors payload has low cost and low weight for the rapid and real time detection of ozone in the troposphere and stratosphere.

3. Work Plan for the Proposed Science Experiment

3.1 Pervious HASP 2017 Flight

The proposed work is in continuation of the previous HASP2017 flight. Overview of output of the last HASP 2017 flight is given in fig.1 (b). The picture of ozone sensors payload, inflating balloon with Helium gas, payload-HASP in stratosphere and the flight profile are also shown in fig. 1(b), while the response of one of ozone sensors, response of photo sensor and ozone sensor S1#4 are shown in fig. 1 (c), and response of UV light sensor mounted on sensor box #S1 and ozone sensor S1#4 with time (UTC) are shown in fig. 1(d).

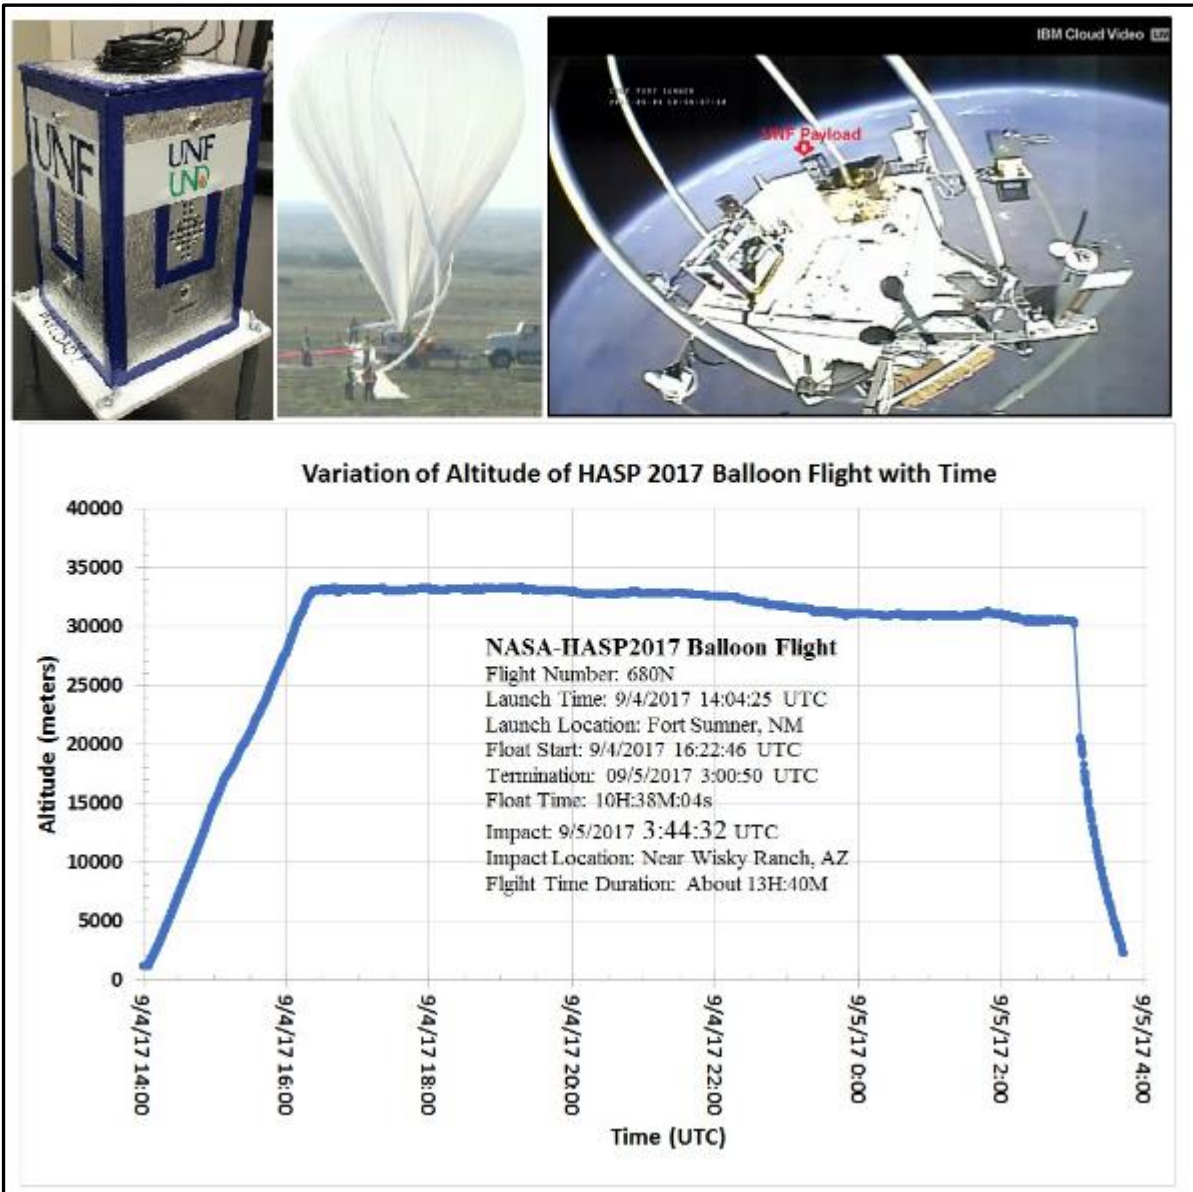


Fig. 1(b) HASP 2017 payload, launch preparation and flight profile.

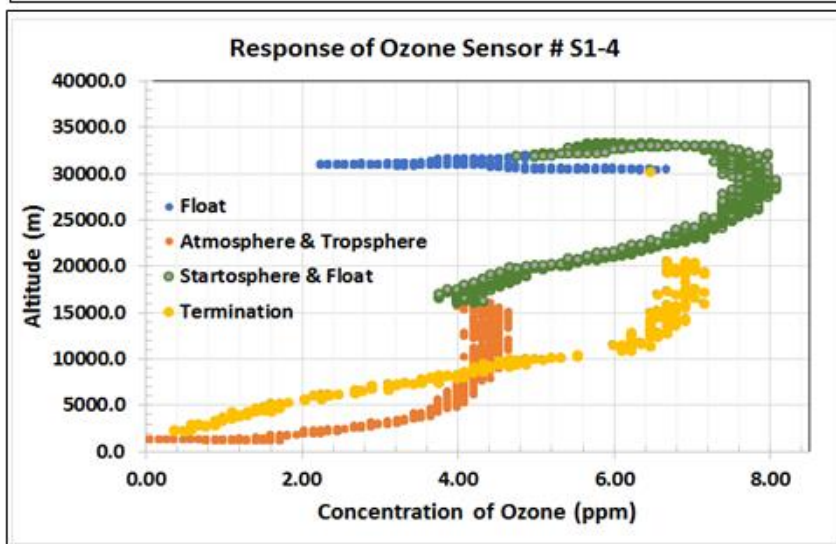
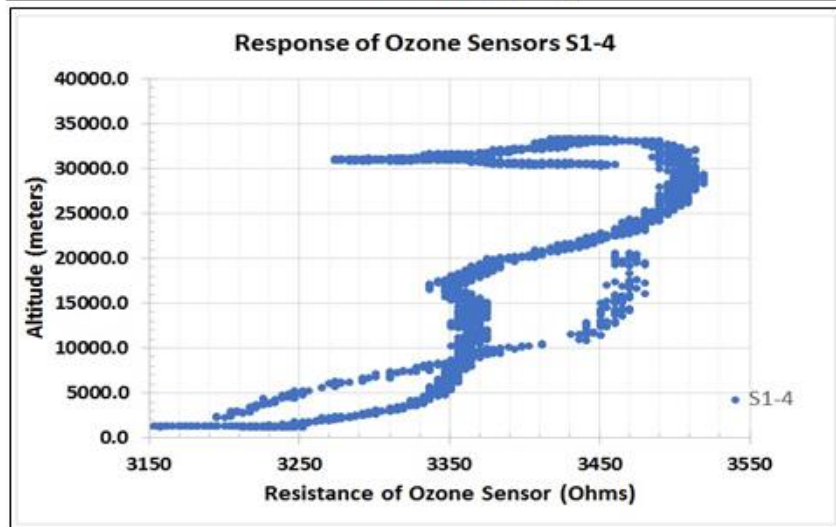
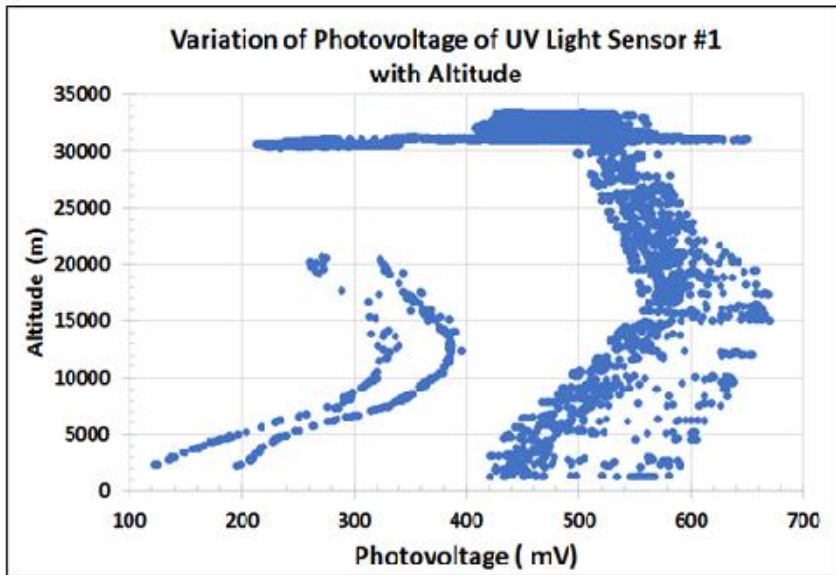


Fig. 1 (c) Response of UV light sensor #1 mounted on sensors box#S1.
Response of ozone sensor S1#4 in change of resistance and change in concentration of ozone.

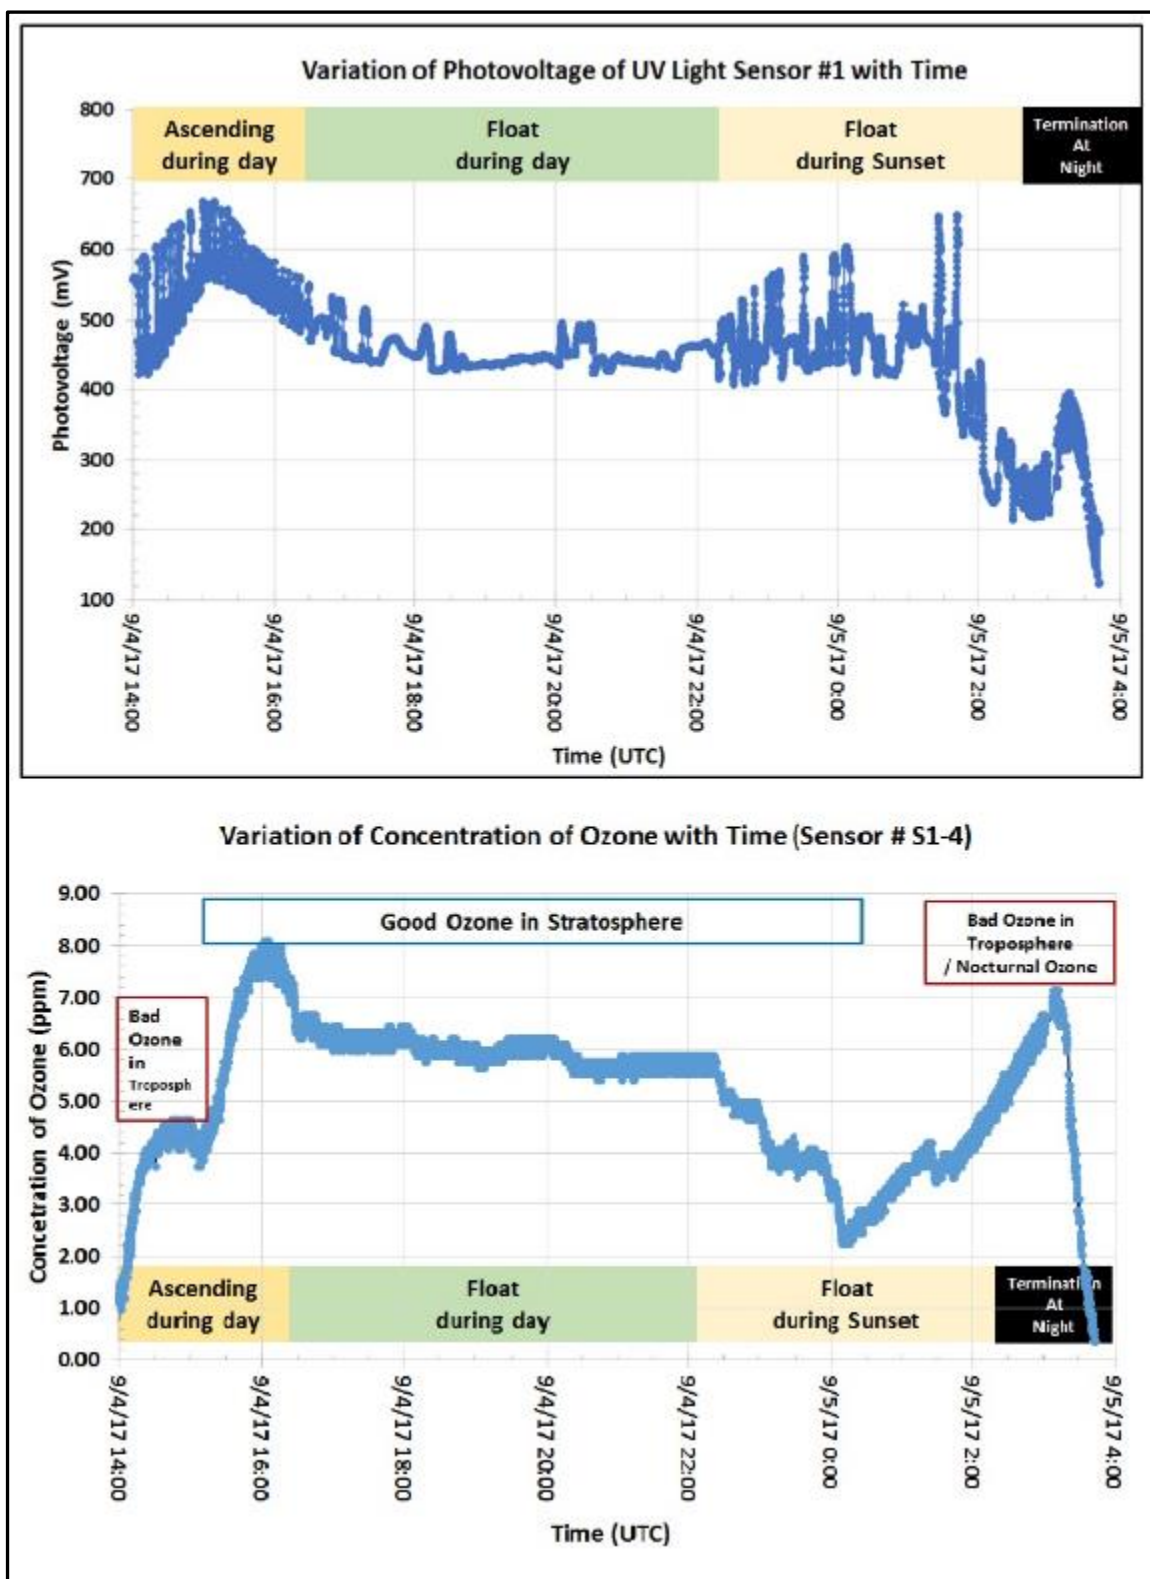


Fig. 1(d) HASP 2017: response of UV light sensor mounted on sensors box # S1 and ozone sensor S1#4.

3.2 Proposed Work Plan

Based on the success, few known technical problems and motivation with the HASP balloon flights made during previous flights, the UNF-UND team proposes a HASP 2018 flight with following new objectives for the measurement of ozone profile in the stratosphere using improved version of the gas sensors payload.

(i) Objectives of nanocrystalline thin film gas sensors boxes

Sensors Box #1

Improved version of nanocrystalline ITO thin film gas sensors array (Box#1) having better selectivity for detection of ozone gas.

Sensors Box #2

We did not able to use silver tungstate sensors during last year due to some issue of alpha phase. We will make the stable alpha phase of silver tungstate (α - Ag_2WO_4) thin film gas sensors having better sensitivity for the measurement of ozone gas.

Sensors Box#3

New version of 8 nanocomposite $\text{In}_2\text{O}_3 + \text{ITO}$ thin film gas sensors will be used for the measurement of bad ozone in pollutant gases and smog.

Students of UNF will fabricate ITO thin film gas sensors using an electron beam deposition method in Dr. Patel's research lab. Three sensors boxes (#1, 2 and 3) will be mounted on the three sides of rectangular payload body.

We are interested to add nano ozone sensors having smaller in size for better performance. We are working on development and fabrication nano size gas sensors using an Electron Beam Lithography (www.raith.com) attached with Scanning Electron Microscope (FEI, Quanta 200D). We may use nano gas sensors in the 2018 flight if we fully satisfied with performance of nano sensors in our laboratory.

All ozone gas sensors will be tested and calibrated simultaneously in the low pressure chamber in order to minimize the experimental error for the trend line equations of the plots for converting the electrical resistance values into the concentration of ozone in the part per million (ppm). The pressure and temperature inside the test chamber will be maintained same as in the stratosphere for measurements of good ozone. Ozone sensors will also be tested and calibrated under troposphere and atmosphere conditions with an appropriate pressure and temperature ranges for measurements of bad ozone and nocturnal ozone.

Each sensors box will have 8 gas sensors, 1 flexible heater, 1 temperature sensor and 1 mini fan. Three sensors boxes will be mounted on three side of cubic payload body. Gas molecules can enter in the sensor box through perforated holes on the payload body. Fan will protect the surface of sensor by blowing away dust particles in the atmosphere and ice particles in the troposphere. Temperature of ozone gas sensors will be maintained nearly

constant at about 305 ± 4 °K using the temperature controller. Flexible heater (MINCO or OMEGA make) and temperature sensor (Analog Device TMP 36) will be mounted on the back side of gas sensors.

(ii) **UV light sensors**

We have used one new GaP (FGAP71) UV light photodiode mounted below box#3 of HASP 2017. We found that the sensitivity of new GaP photodiode is better than that other two Si based photodiodes. Therefore, we will replace two old Si photodiodes for sensors box # 1 and 2 with new GaP (FGAP71) photodiodes.

This GaP (FGAP71) photodiode has wavelength range 150 to 550 nm and peak wavelength of 440 nm, which is shown in Fig. 1(e).

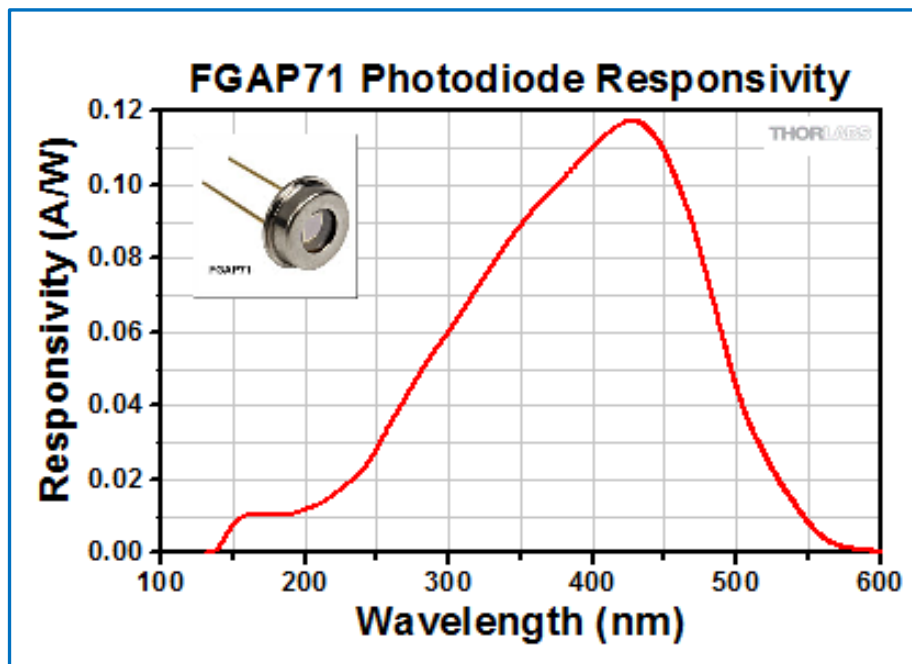


Fig. 1(e) Response of GaP (FGAP71) photodiode (Courtesy: www.thorlabs.com) http://www.thorlabs.com/newgrouppage9.cfm?objectgroup_id=285&pn=FGAP71.

Photodiode will be mounted just below the gas sensors box on each side of the payload body. The photodiodes will support the verification of science concept of generation of ozone in the presence of UV light. The amount of photo voltage generated and measured by the photodiodes will indicate how much of UV light available to interact with oxygen to convert into ozone gas near to ozone gas sensors. Our gas sensors arrays will detect and measure the concentration of that generated ozone gas. This **science concept** will also help us to understand the effect of any shadow or darkness on the sensors surface, particularly at the time of sunset and decrease of ozone concentration at the night time.

(iii) **New Low Pressure Sensor**

It was observed that the pressure sensor used in the previous flight was worked from atmosphere to 100 mbar and then saturate. We propose to replace it by new pressure sensor, which can measure the pressure up to 10 mbar or below.

The new sensors may be purchased from

- (i) <http://www.meas-spec.com/product/Pressure/MS5540C.aspx> or
- (ii) <http://www.omega.com/pptst/PX170.html>

(iv) **GPS:**

The current UBLOX GPS worked well during last flight. The antenna of GPS was installed away from the payload body and worked well. We will use the same GPS again. The payload GPS data will be cross verified and compared with the HASP GPS data.

(v) **Improved and thermally stable payload body:**

A single hollow aluminum tube structure will be used to make the payload body. The body work will be almost same as the last flight. This design will reduce the numbers of screws and nuts and hence weight of the payload. This will also allow us to open and close the payload easily for access of the hardware. We will try to reduce the mass of the body. The inner surface of body may have very low outgassing at the low pressure. We are also exploring new alloy material as well as carbon fiber sheets to reduce the weight as well as improve the mechanical strength and thermal stability of the payload body.

Thermal blanket made of aluminized heat barrier having adhesive backed (Part No. 1828- or equivalent) (Make: www.PegasusAutoRacing.com) will be applied on the payload for the improvement of thermal stability. The silver surface of the thermal blanket has high reflection with wide range of wavelength of light and hence capable of withstanding radiant temperatures in excess of 1000°C as shown in Fig. 1(f).

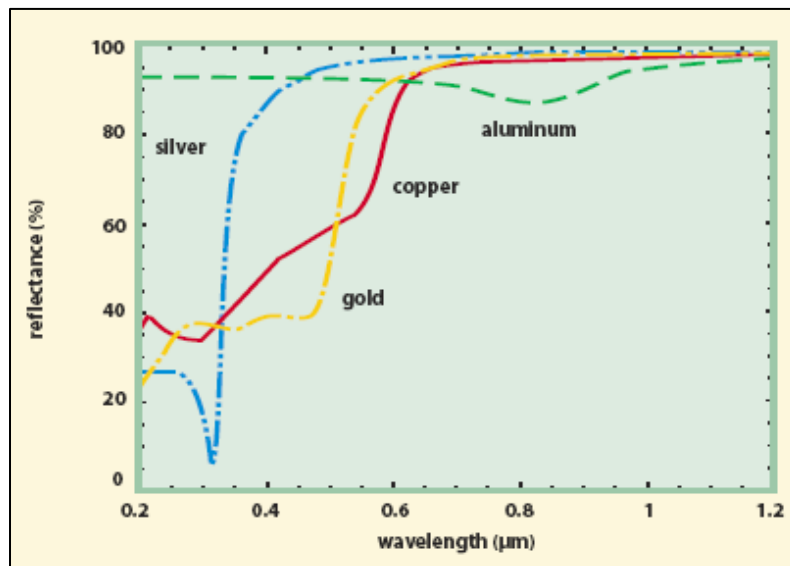


Fig.1 (f) Variation of reflectance with wavelength of light from different color of surfaces

Courtesy: <http://www.photonics.com/EDU/Handbook.aspx?AID=25501>

- (vi) **Improved version of software**
New JAVA based software will allow us to convert all RAW files directly into one EXCEL file. Then, calibration trend line equations will be applied to convert the change in resistance values of sensors into the concentration of ozone gas in ppm. In addition, new LabVIEW program will allow us the quick monitoring of data and viewing of the plots during the thermal vacuum test and also during the flight.
- (vii) **Use of SEM+EDAX**
The surface topography of the sensors before and after the flight will be studied using a scanning electron microscope (SEM) (FEI, Quanta 200D), and the chemical composition of the surface of the sensors will be analyzed by energy dispersive analysis of x-rays (EDAX) at UNF under supervision of Dr. Patel.
- (viii) **Radio - Optional objective:** We are interested to add the 900 MHz or higher frequency radio for the data communication of data. This will depend upon the financial support and clearance of all the paper work and permission. If it will be possible, then, we will inform to Dr. Guzik and Doug Grainger about all required changes in the payload. We are interested to communicate our data using the HASP communication link as well as the payload radio. Government certified radio in the payload may be turned on or off by up linking of the command from the ground. Radio circuit will have an antenna and may operate by battery backup or HASP power. We want to test our technological concept for the communication. This will help us to build a free flying payload for our future venture.
- (ix) **Testing of the payload**
Students will perform the electronic hardware and software testing of the payload at the UNF. They will also perform the mechanical tests including shock and stress analysis using simulation program. They will also perform the estimated thermal stability of PCB as well as sensors boxes at the low and high temperature under low and high vacuum in the vacuum chamber. All tests will be performed before integration of payload workshop at Palestine, TX. After flight, team will perform the failure analysis and data analysis and also prepare the final science report.
- (x) **Deliverable of HASP2018**
Working as a team, submission of monthly science report, participation of monthly teleconference, fabricate the working payload, testing and integration of payload, launching the payload and data collections, data analysis, and final science report.

3.3. Fabrication of Gas Sensors Arrays

Nanocrystalline thin film gas sensors array (UNF patent pending) will be fabricated over the ultrasonically and chemically cleaned glass substrates. Fig. 2(a) shows the top view of 8 sensor arrays and the interface printed circuit board. Fig. 2(b) shows a scanning electron micrograph of one ITO thin film gas sensor having two gold electrodes for the external electrical contacts. Fig.2(c) shows a scanning electron micrograph of nanocrystalline grains of the ITO thin film, while the sensor boxes are shown in fig. 2(d).

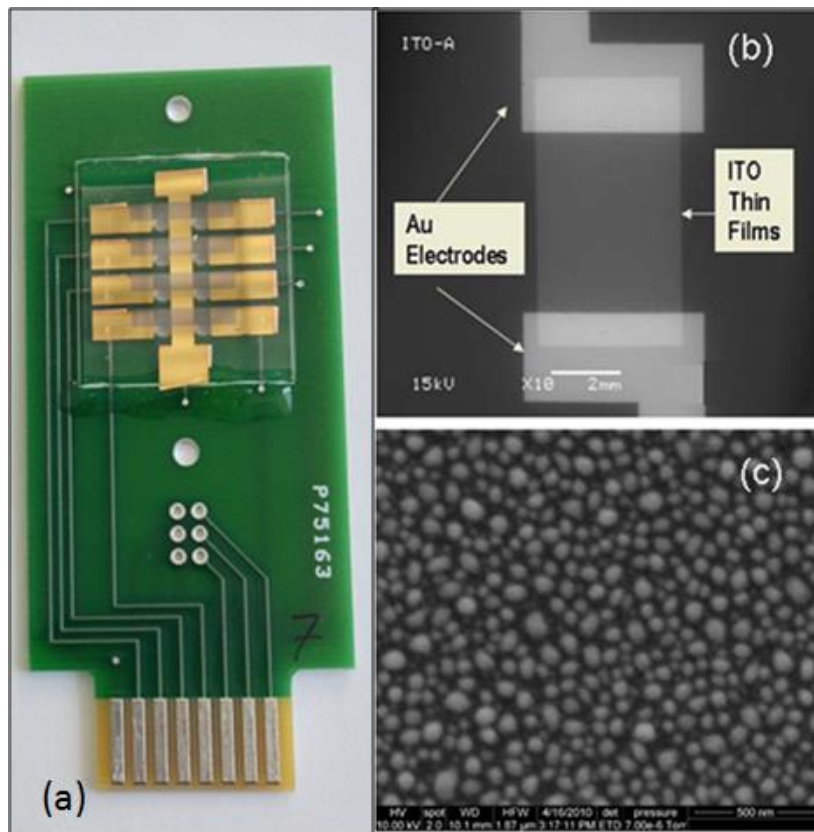


Fig.2 (a) 8 sensor array and interface mini PCB, scanning electron micrograph of (b) top view of one ITO gas sensor, and (c) nanocrystalline grains of ITO thin film

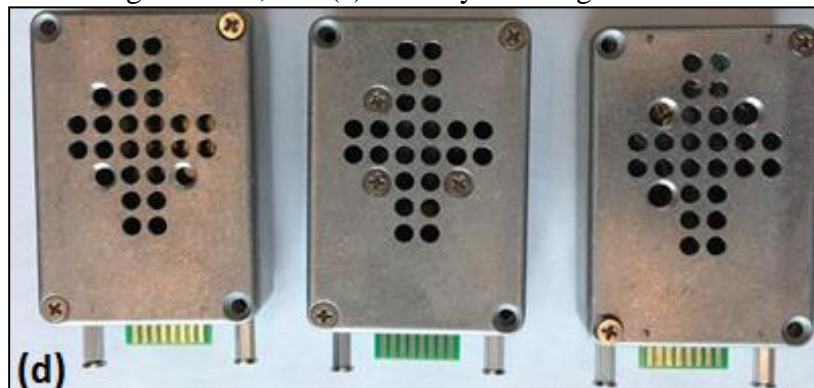


Fig.2 (d) sensors boxes

Box#1: 8 nanocrystalline ITO (Indium Tin Oxide) thin film gas sensors having better selectivity for detection of ozone gas in the stratosphere.

Box#2: 8 nanocrystalline α - Ag_2WO_4 (silver tungstate) gas sensors having better sensitivity for detection of ozone gas in the stratosphere.

Box#3: 8 nanocomposite In_2O_3 -ITO thin film gas sensors for detection of ozone in pollutant gases and smog in atmosphere and troposphere.

Each type of sensor array box will have different sensor characteristic parameters for the detection of gases. Three different types of gas sensor arrays boxes will be fabricated at UNF. Each box will have 8 gas sensors, one heater, one temperature sensor and one fan (Fig. 3).

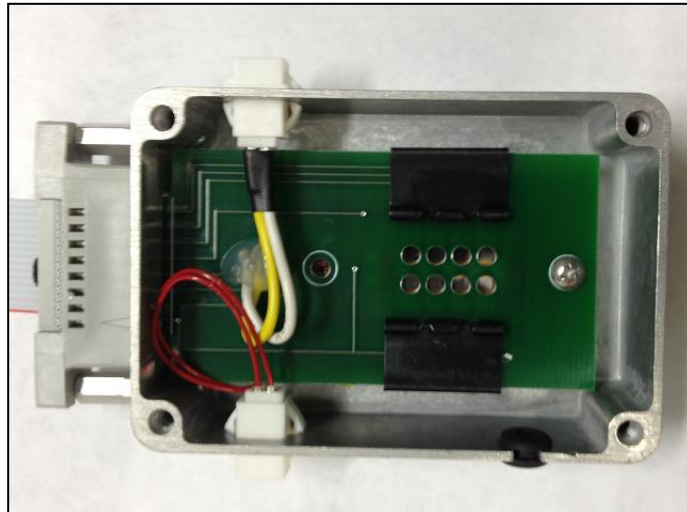


Fig. 3 Schematic diagram of sensor array box


The sensor array will be interfaced with the printed circuit board and its 16-pin female card edge connector and flat cable. Sensors will be tested and calibrated with ozone under low pressure at UNF. An ozone generator (Ozone Solutions, Model# OMZ-3400) will be used as the source of ozone, which generates 0 to 12 ppm ozone gas. A digital ozone detector (Eco Sensors, Inc., Model:A-21ZX) will be used to measure the concentration of ozone. Keithley electrometer and multimeter with LabVIEW software will be used to measure resistance of all sensors simultaneously in the test chamber. The parameters of trendline equations of calibration plots will be used for the determination of concentration of ozone.

3.4 Working Principle of Gas Sensors

Interaction of oxidizing gas on surface of n-type ITO thin film sensor

Upon adsorption of charge accepting molecules at the vacancy sites, namely from oxidizing gases such as ozone (O_3), these electrons are effectively depleted from the conduction band of ITO. This leads to an increase in the electrical resistance of n-type ITO.

For example: ozone gas:




Vacancies can be filled by the reaction with ozone. Filled vacancies are effectively electron traps and as a consequence the resistance of the sensor increases upon reaction with ozone.

Interaction of reducing gas on surface of n-type ITO thin film sensor

Oxygen vacancies on ITO surfaces are electrically and chemically active. These vacancies function as n-type donors decreasing the electrical resistivity of ITO. Reducing gases such as CO , H_2 and alcohol vapors result in detectable decreases in the electrical resistance of n-type ITO.

For example: methanol:



Vapors come in contact with the surface and react with chemisorbed oxygen ions O^- or O^{2-} and re-inject electrons into the conduction band.

In summary, the electrical resistance of ITO increases in the presence of oxidizing gases such as ozone. Upon adsorption of the charge accepting molecules at the vacancy sites, namely oxidizing gases such as ozone, electrons are effectively depleted from the conduction band, leading to an increase in the electrical resistance of n-type ITO. Note that our three different types of sensors boxes have n-type semiconductor gas sensors.

3.5 Mechanical Specifications of Payload:

The proposed 2018 payload body will be nearly similar to the last year payload body. The important features of our newly designed payload body are easy to open and close the payload, easy access of PCB and sensor boxes, low rate of outgassing under low pressure, better stability with thermal and impact, and also reusable. The payload metal parts were procured payload from the supplier www.onlinemetals.com.

Note: We are trying to replace an aluminum square tube by a fiber glass or carbon composite square tube in order to reduce the weight of payload and improve the thermal stability. We may order the fiber glass tube from <http://www.eplastics.com/Fiberglass-FRP-Round-Square-Tubing>. Currently, this company is not offering 6 inch square tube. This company informed us few months back that they may introduce 6 inch square tube in the market in near future.

The weight budget of various parts of the payload is given in the table-1.

Table-1 Payload weight and dimension budget

Item:	Dimension	Mass (g)
8 Ozone sensors box #1 (including fan, heater, box)	Each box	200.0±2.0
8 Ozone sensors box #2 (including fan, heater, box)	3 x 2 x 1 inch	200.0±2.0
8 Pollutant sensors box#3 (including fan, heater, box)	=76.2x50.8x25.4 mm	200.0±2.0
Microcontroller PCB with mounted components	4x 6 inch =101.6 x152.4 mm	300.0±1.0
Payload body, top plate and thermal blanket	9 x 6 x 6 inch =228.6x152.4x152.4 mm	1000±10.0 g
Few Cables, 1 GPS, 2 LEDs, 3 Photodiodes, nuts and bolts		300±5.0 g
HASP mounting plate	7.9 x 7.9 inch =200.6x200.6 mm	550±3.0 g
Total estimated mass of the payload with HASP mounting plate		2750±25.0 g

We will use the nearly same design of payload body made by Joe (UNF) and modified by Chris in 2017. UNF students will make the modification of design and will new payload body again this time. Design diagrams of payload are shown in Fig. 4 (a) to (l). The estimated dimensions of payload of HASA 2018 will be about 228.6 mm x 150 mm x 150 mm, which will be within the requirement of being less than 300 mm x 150 mm x 150 mm. There may be possibility to reduce proposed dimension as well as design. The payload body will easy to open and close design utilizing the top plate for access to the PCB as well as all sensor boxes. The payload continues to feature a rectangular design due to its robustness as well as for its low rate of outgassing under

extreme pressure drops. The details of design and drawing and fabrication work are shown in fig. 4 (a) to (o).

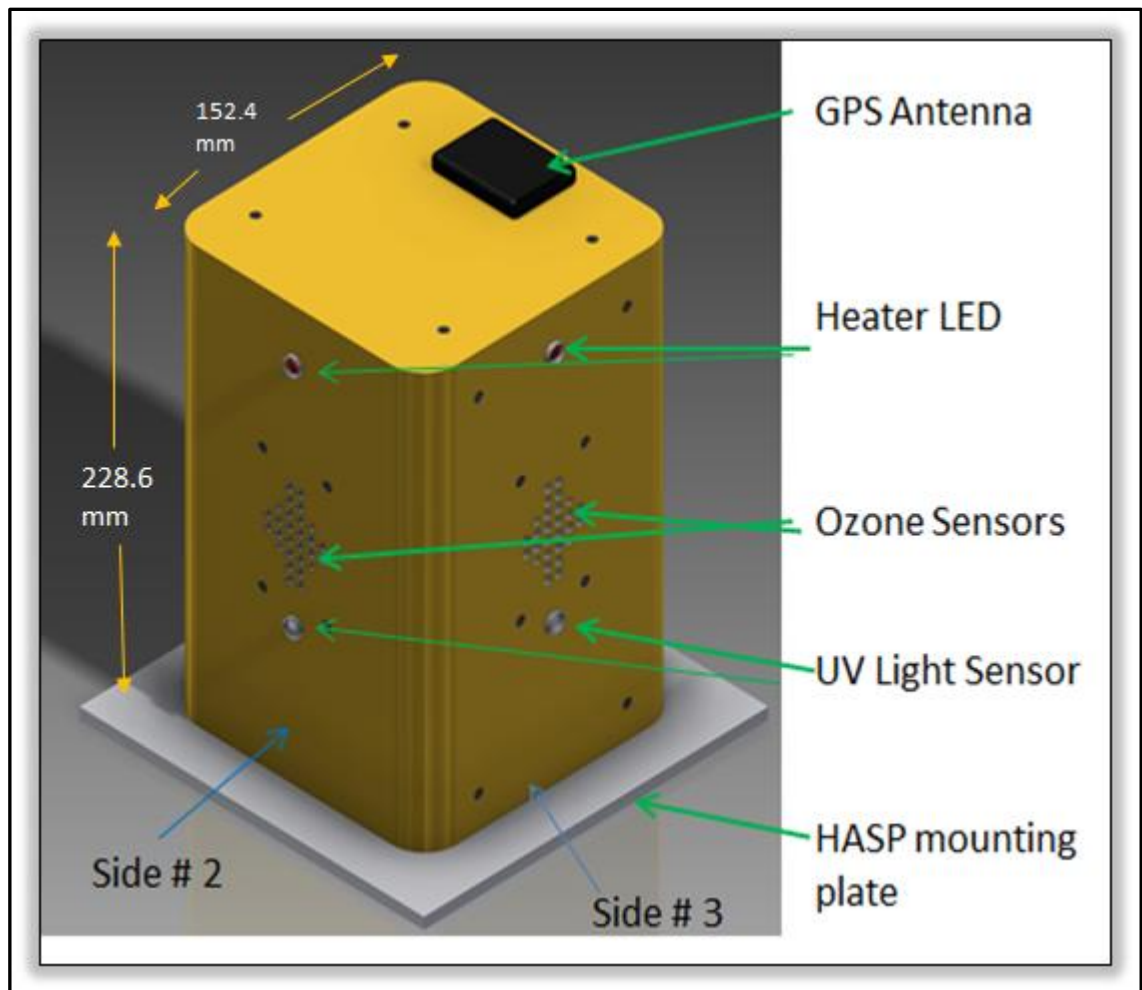


Fig.4 (a) Design of payload body.

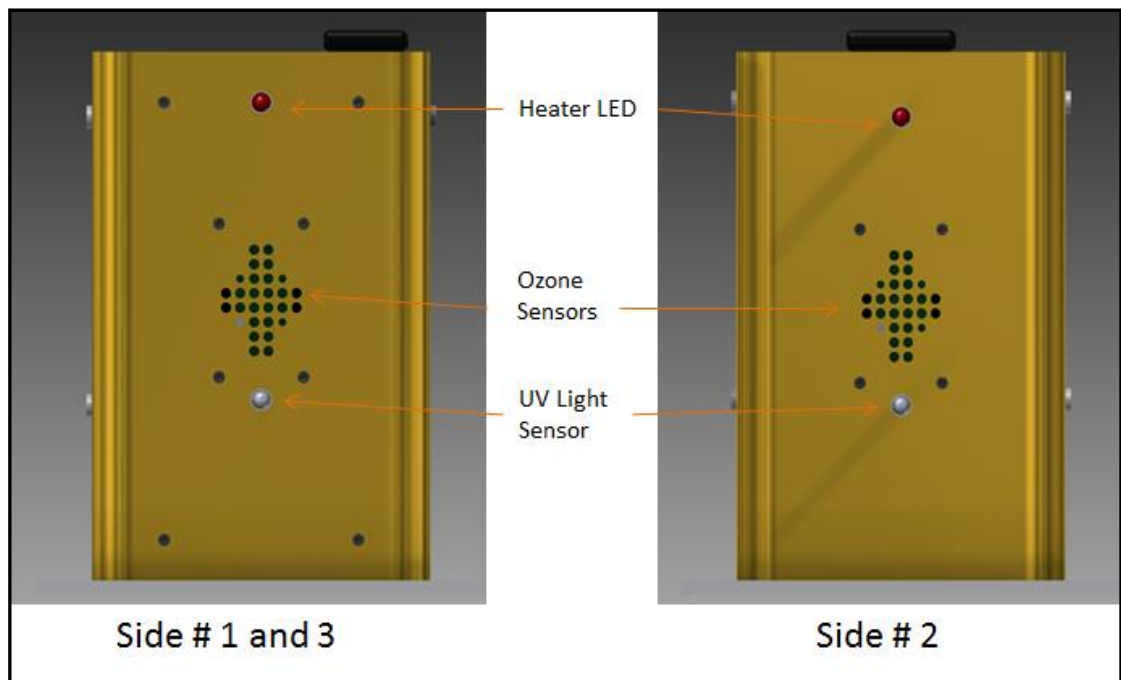


Fig. 4 (b) Side view design of the payload

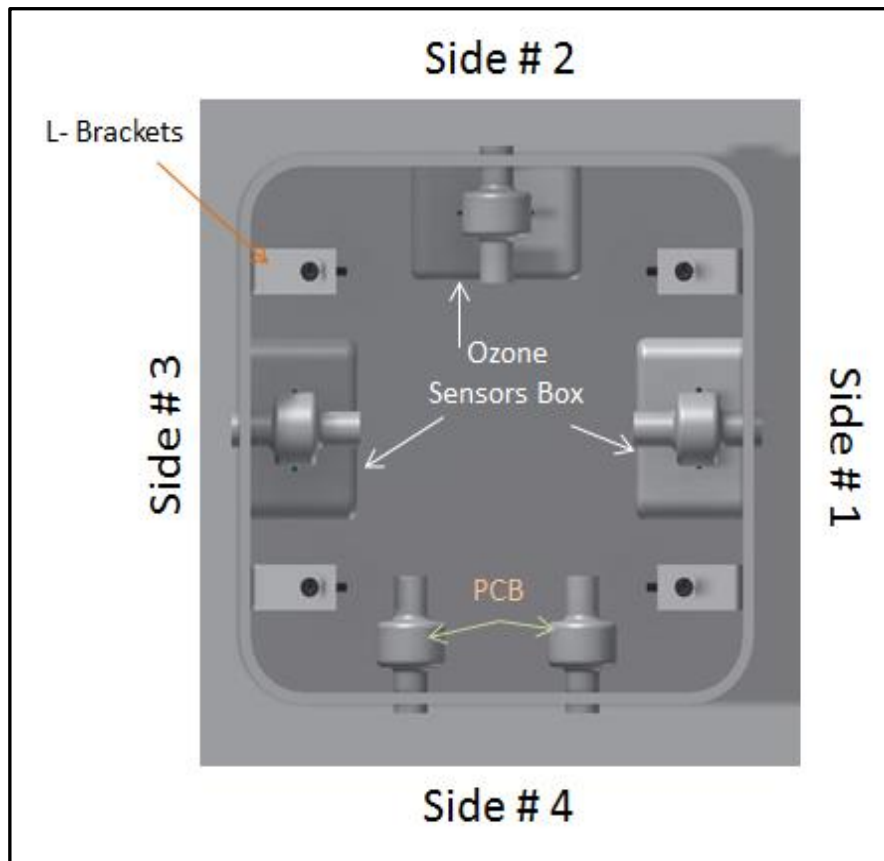


Fig. 4 (c) Top view design of the payload

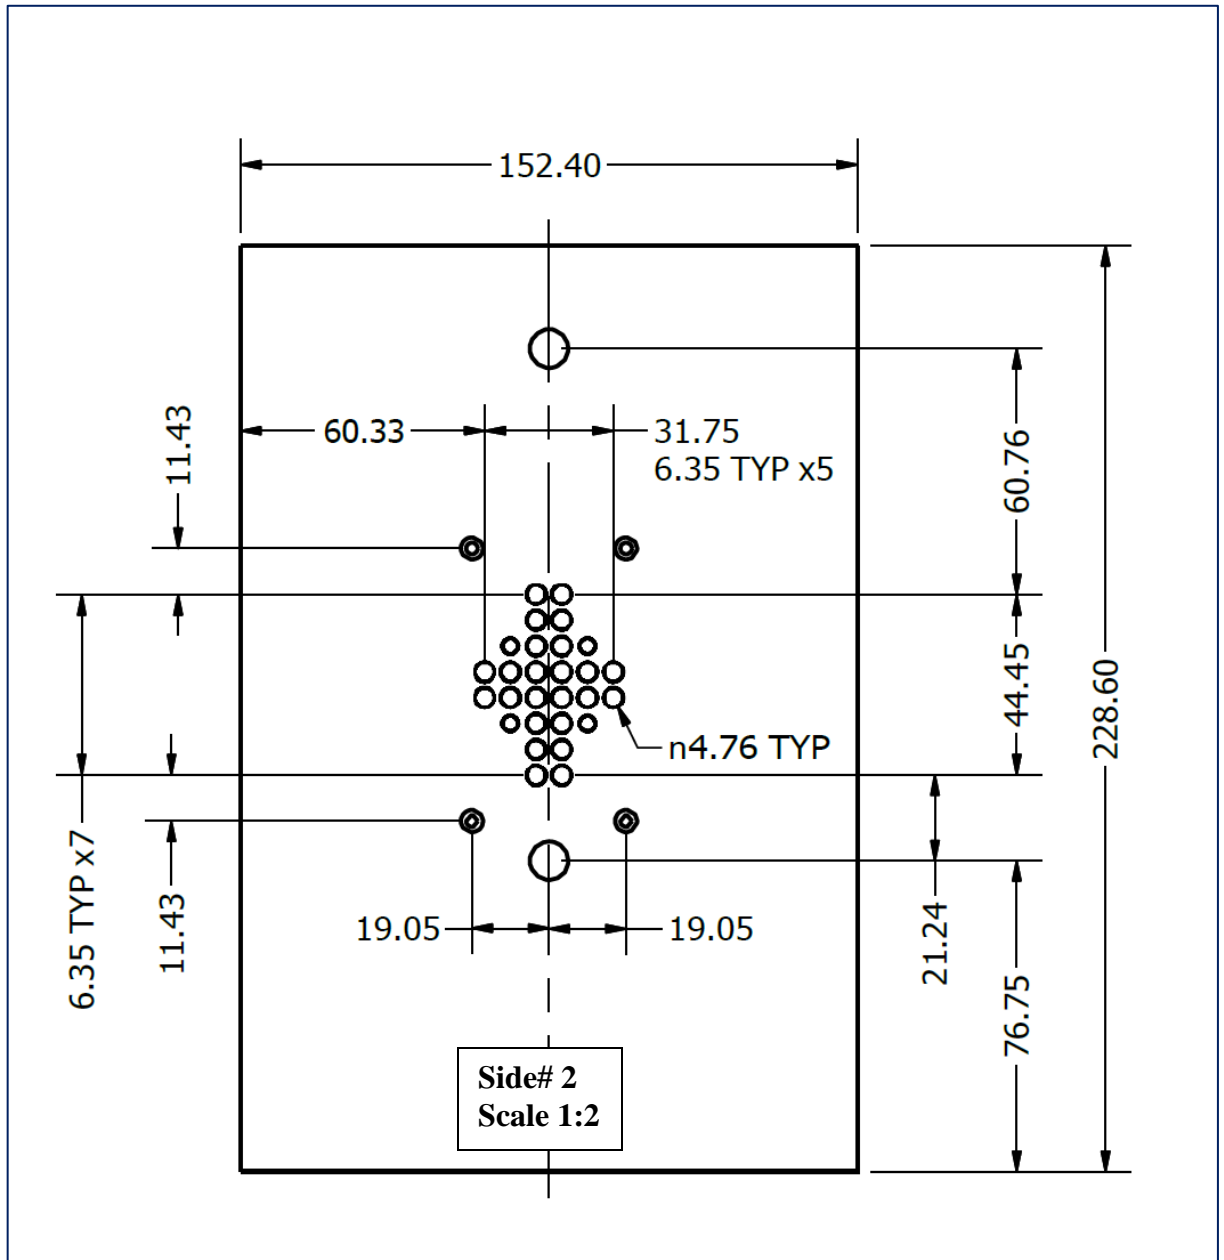


Fig.4 (d) Design of side # 2 of the payload. All dimensions are in mm.

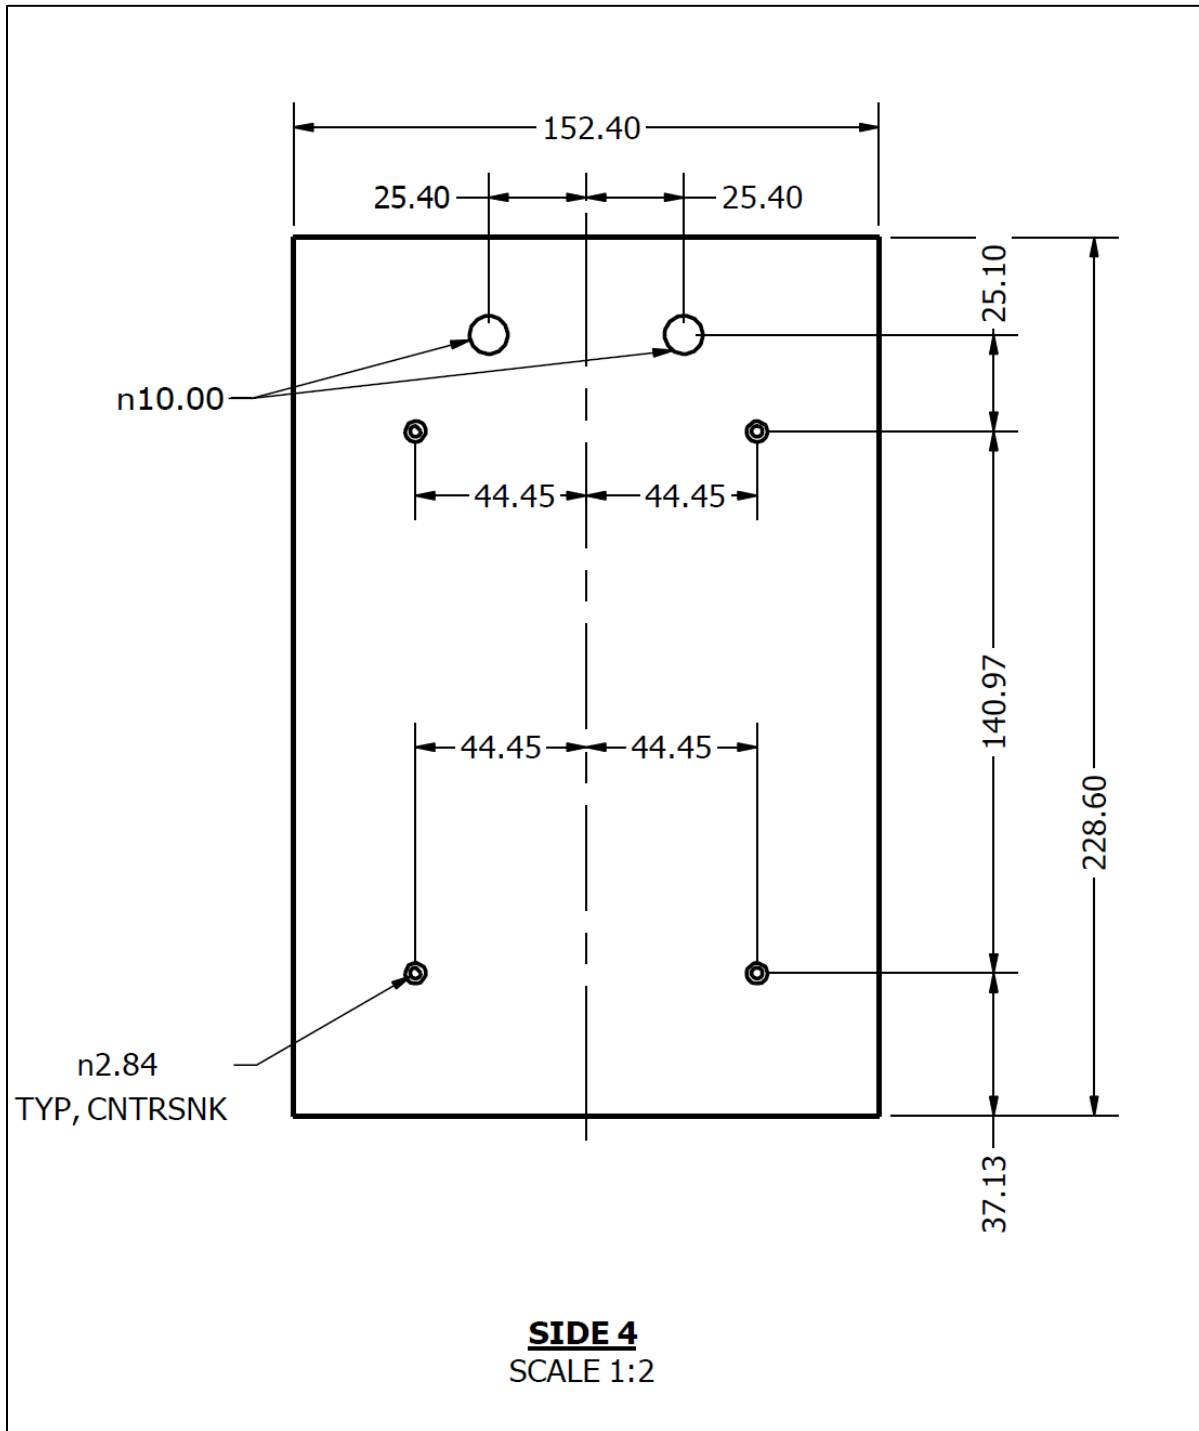


Fig. 4(e) Design of side # 4 of the payload
All dimensions are in mm.

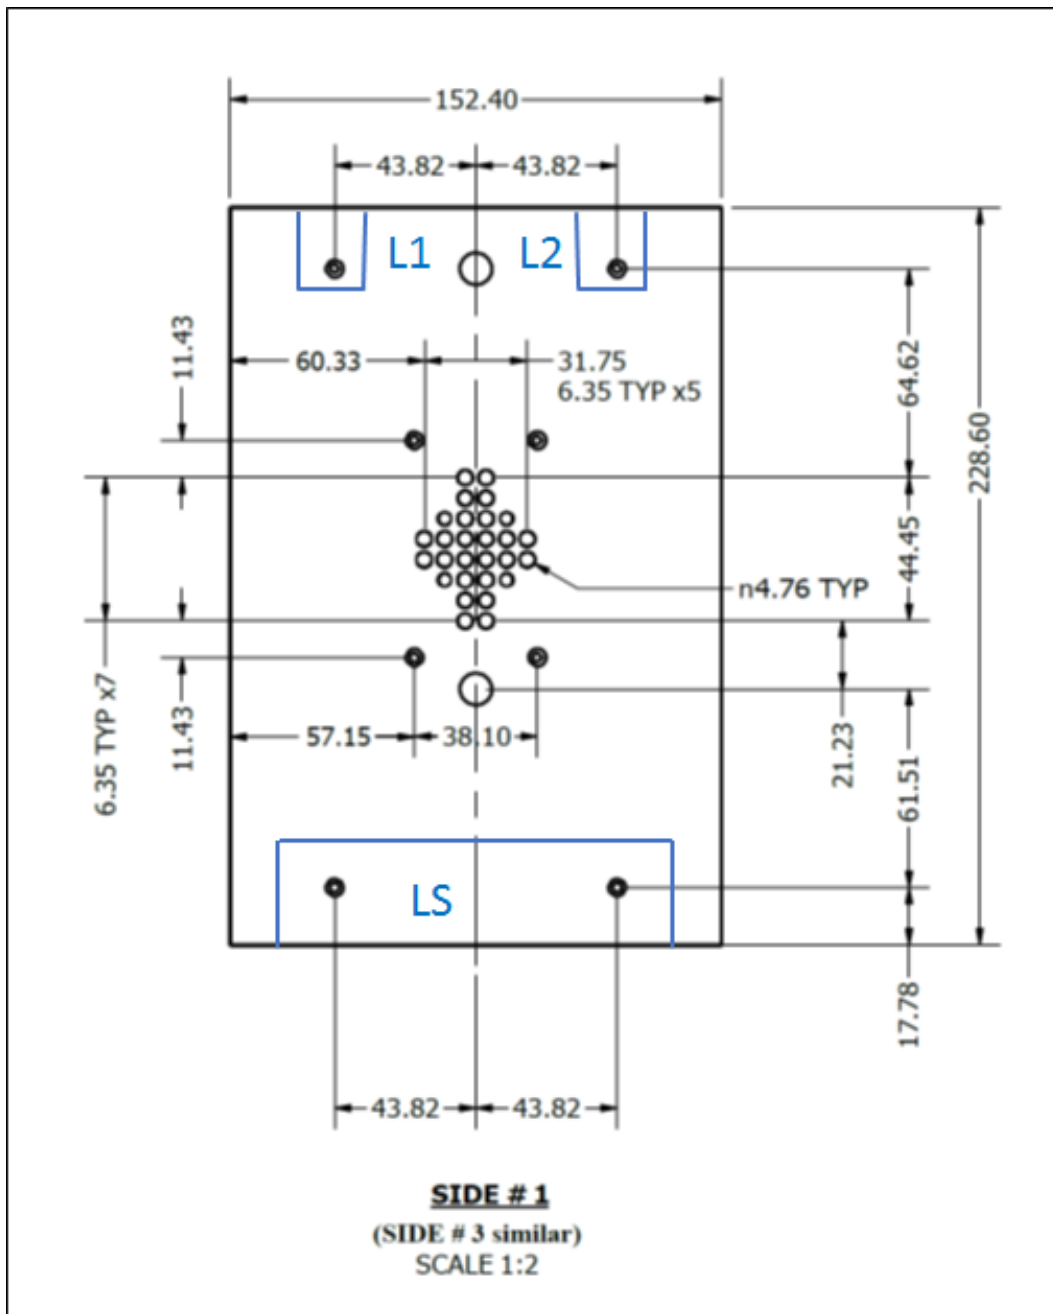


Fig. 4(f) Design of sides # 1 and 3 of the payload.
All dimensions are in mm.

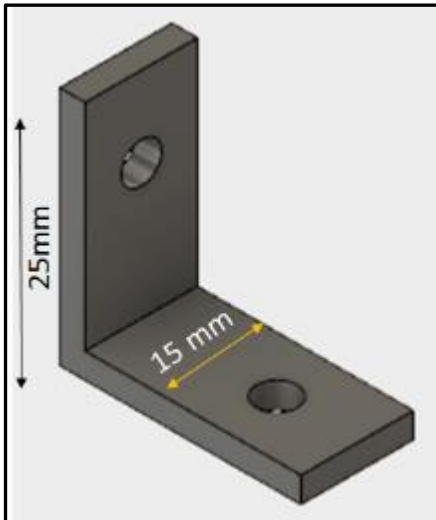


Fig. 4 (g) Schematic diagram of L- Bracket.

L1 and **L2** are L-Brackets for mounting the top lid on the payload body

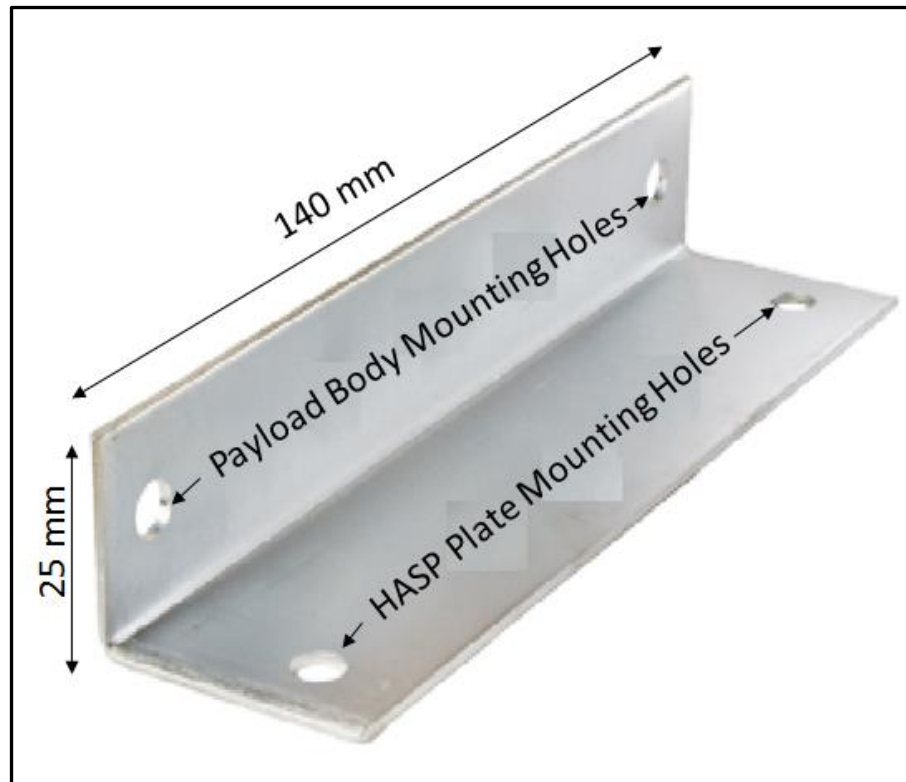


Fig. 4 (h) Schematic diagram of L-Strip (**LS**) for mounting the HASP plate with Payload body

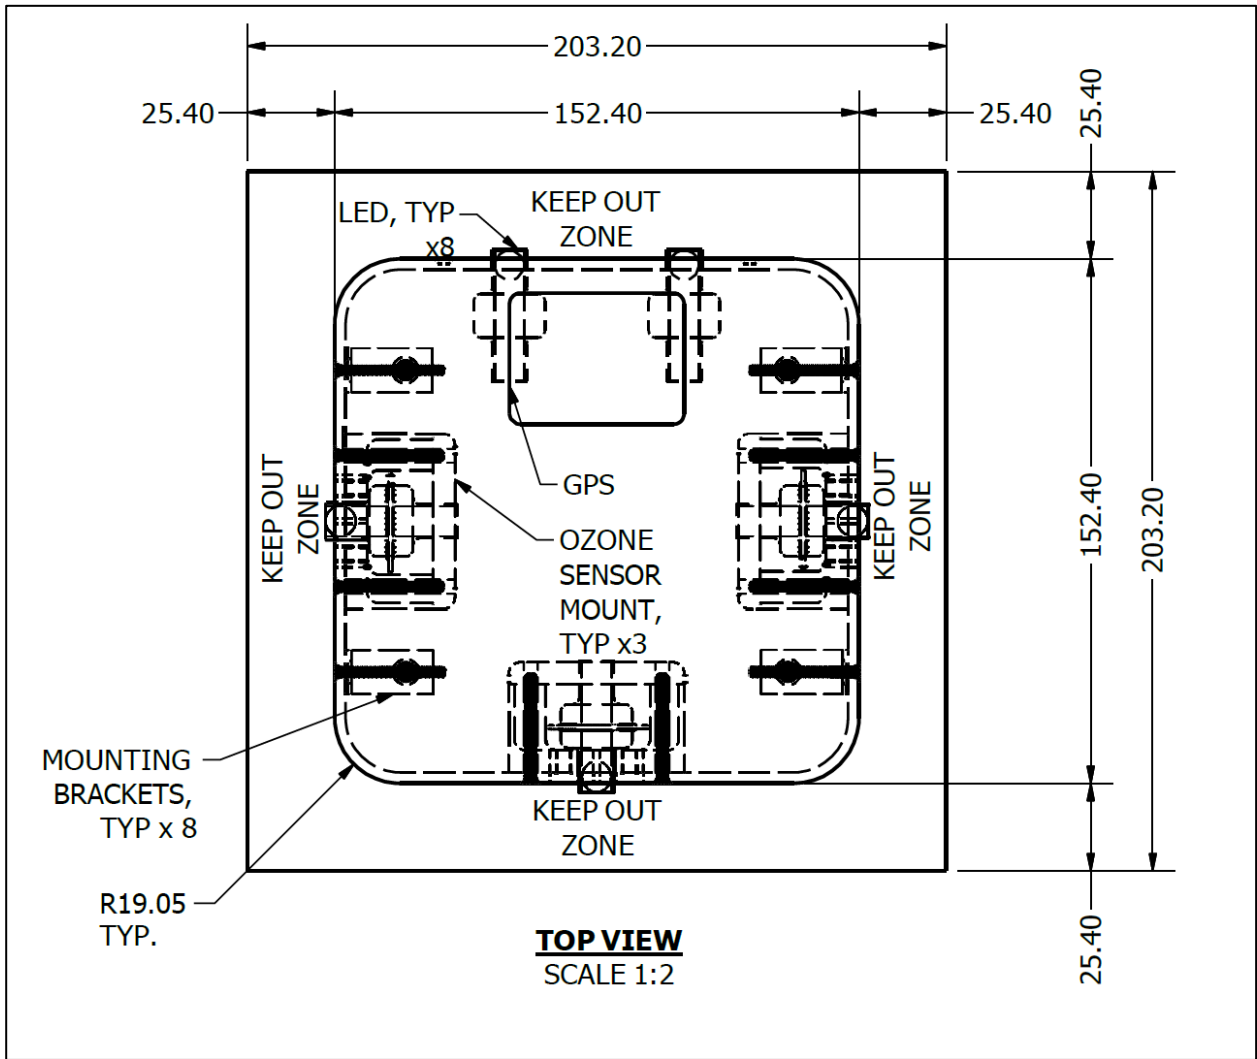


Fig. 4 (i) Design of top view of the payload. All dimensions are in mm.

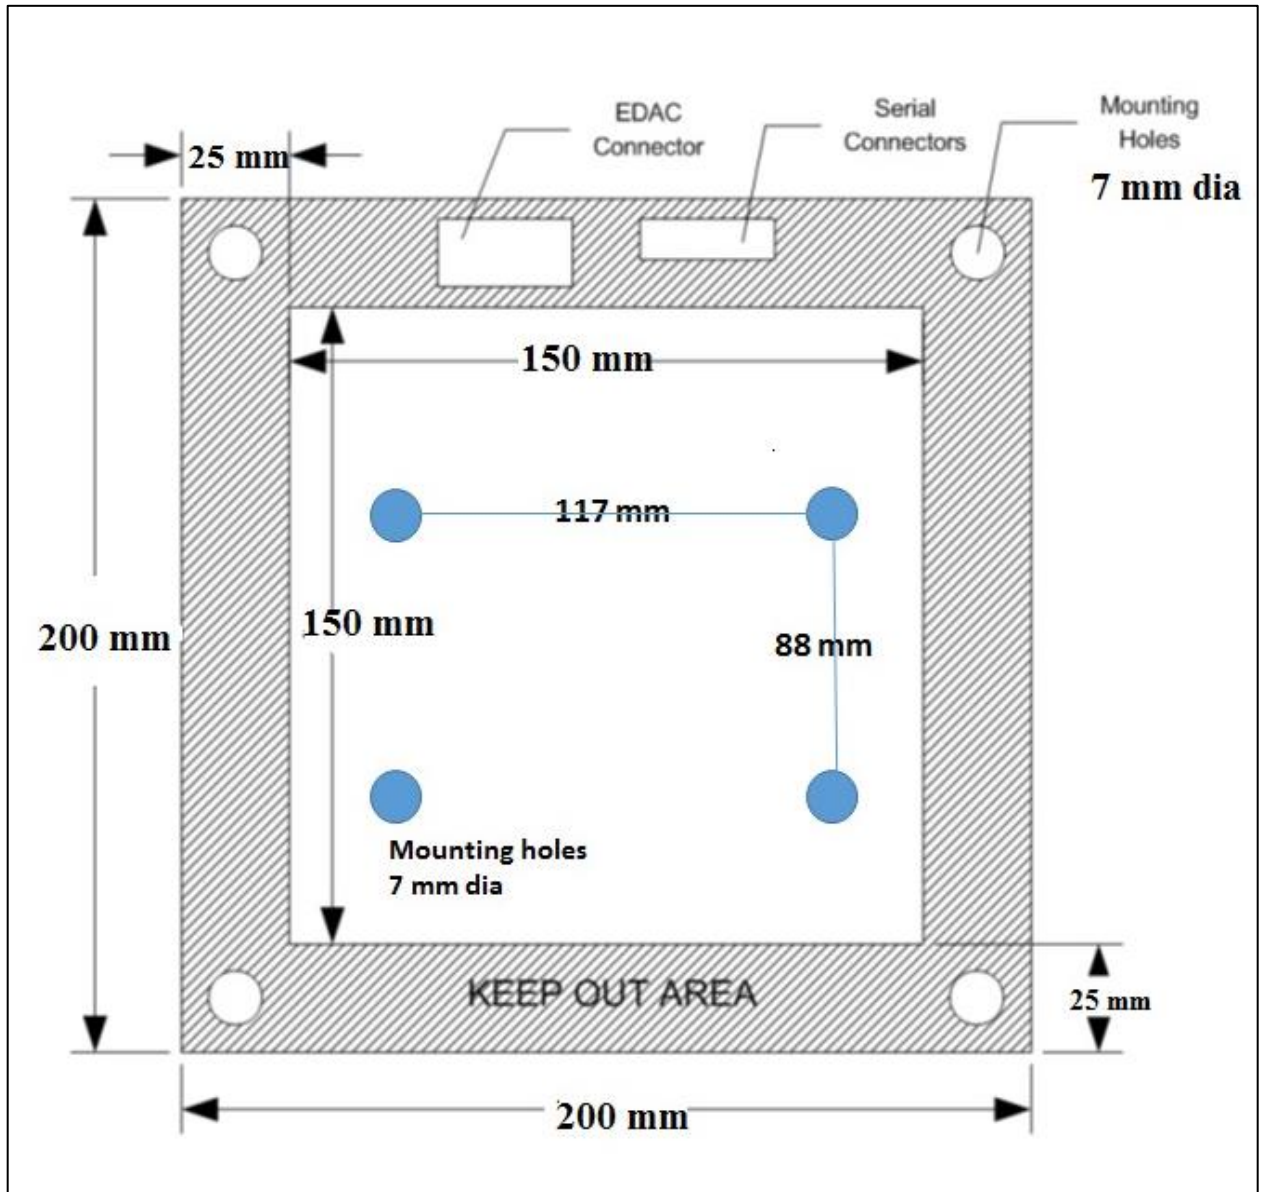


Fig. 4 (j) Position of Four mounting holes in blue color (7 mm diameter) on the HASP mounting plate.

We will make sure that the payload will be well secured so that it remains intact and attached to the HASP mounting plate under a 10 g vertical and 5 g horizontal shock. In addition, the payload body is aluminum so that it will certainly survive and operate in the very low pressure range of 5 to 10 millibars at float altitude.

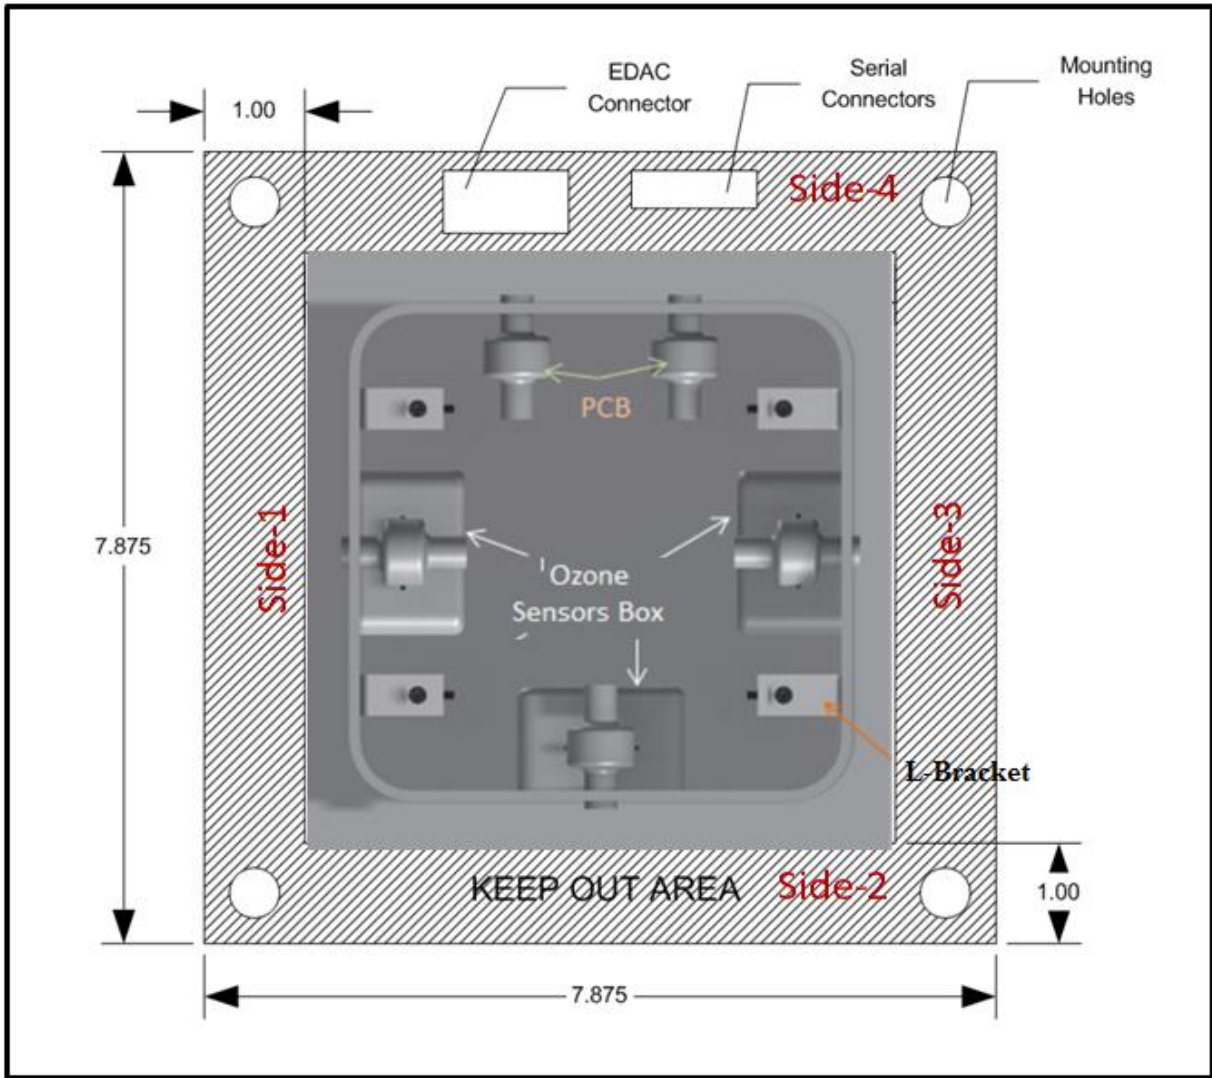


Fig. 4(k) Top view design of payload mounted on the HASP mounting plate

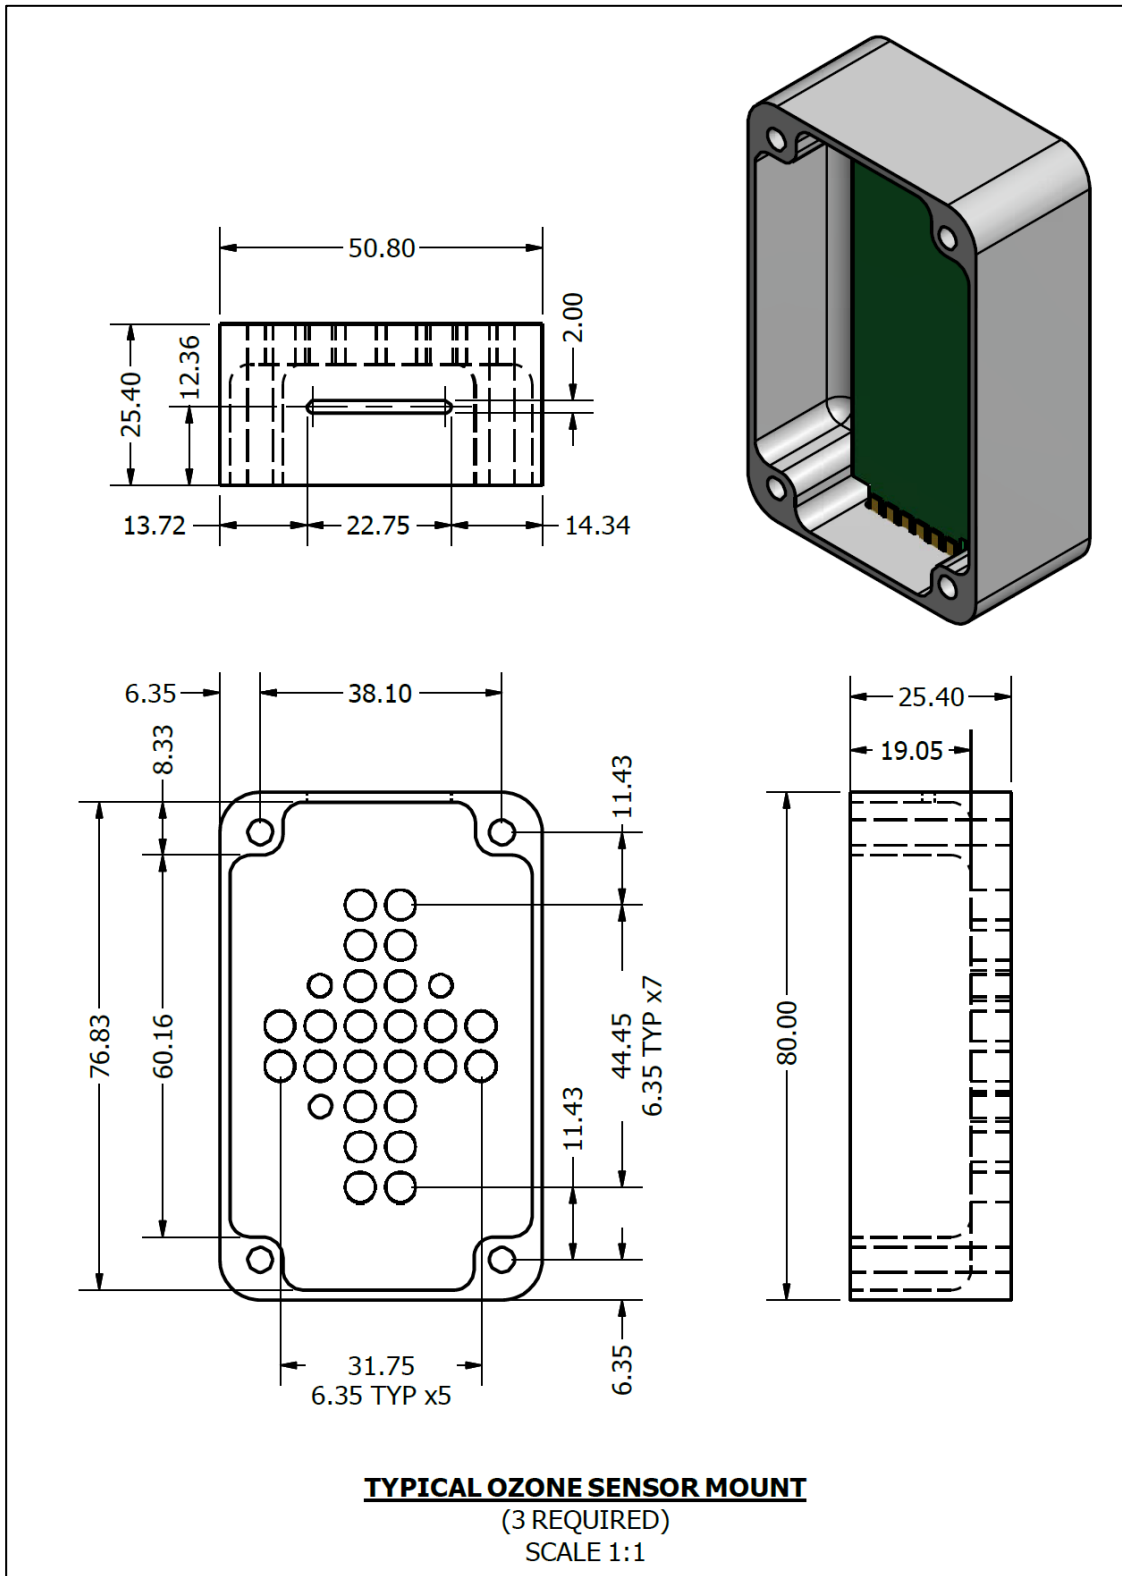


Fig. 4 (l) Design of top view of the payload. All dimensions are in mm.

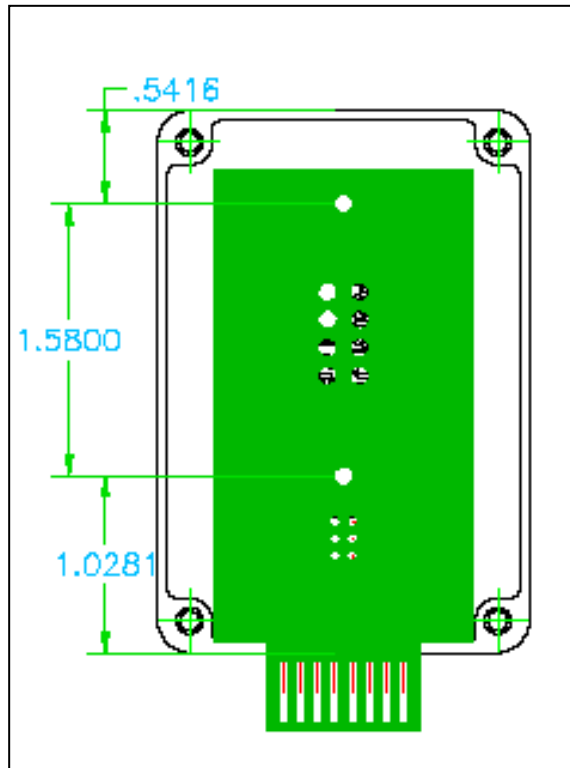


Fig.4 (m) Design for standoff to mount sensor PCB in the box

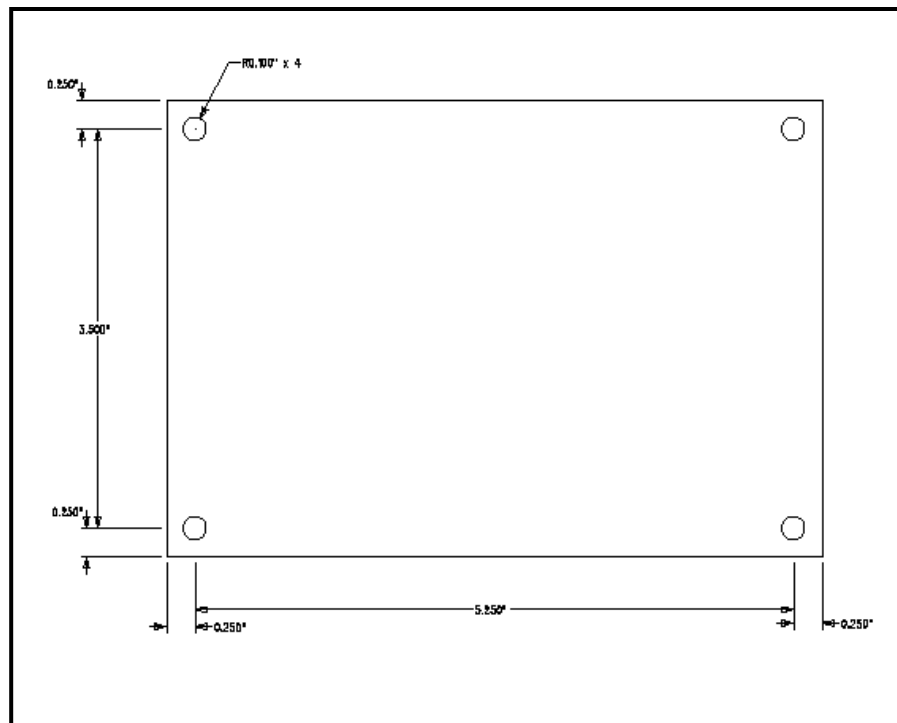


Fig. 4 (o) Design for hole of the microcontroller PCB

3.6 Payload Mounting Footprint

Selection of the small payload dictates the mounting plate that interfaces with the payload. This mounting plate design is provided in the HASP Student Payload Interface Manual (Version 02.17.09) and is shown below in Fig.5. This mounting plate design will not require any modification except to make four mounting hopes as shown in previous fig. 4(j).

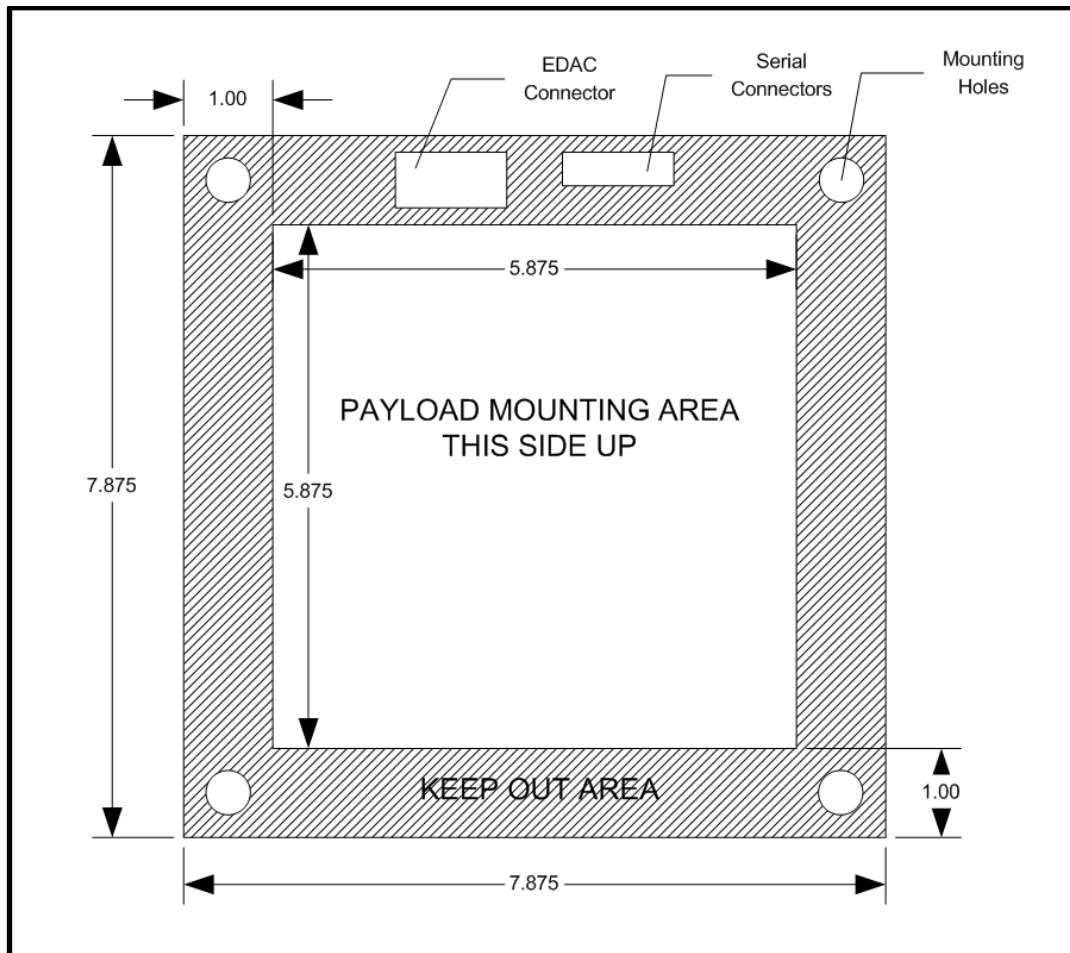


Fig. 5 Mounting Plate for small payload (Courtesy: HASP Version 02.17.09 [6])
http://laspace.lsu.edu/hasp/documents/public/HASP_Interface_Manual_v21709.pdf

3.7 Desired location and orientation of payload on HASP

The requested smaller payload should be oriented on the side away from any solar cells to avoid disparate solar thermal radiation. There should not be any obstacle for air circulation into payload and also any shadow of other payload. We would like the position of the payload (#7) on HASP to be the same as in the previous flights. Fig. 6 (a) and (b) shows our desired location of payload on HASP.

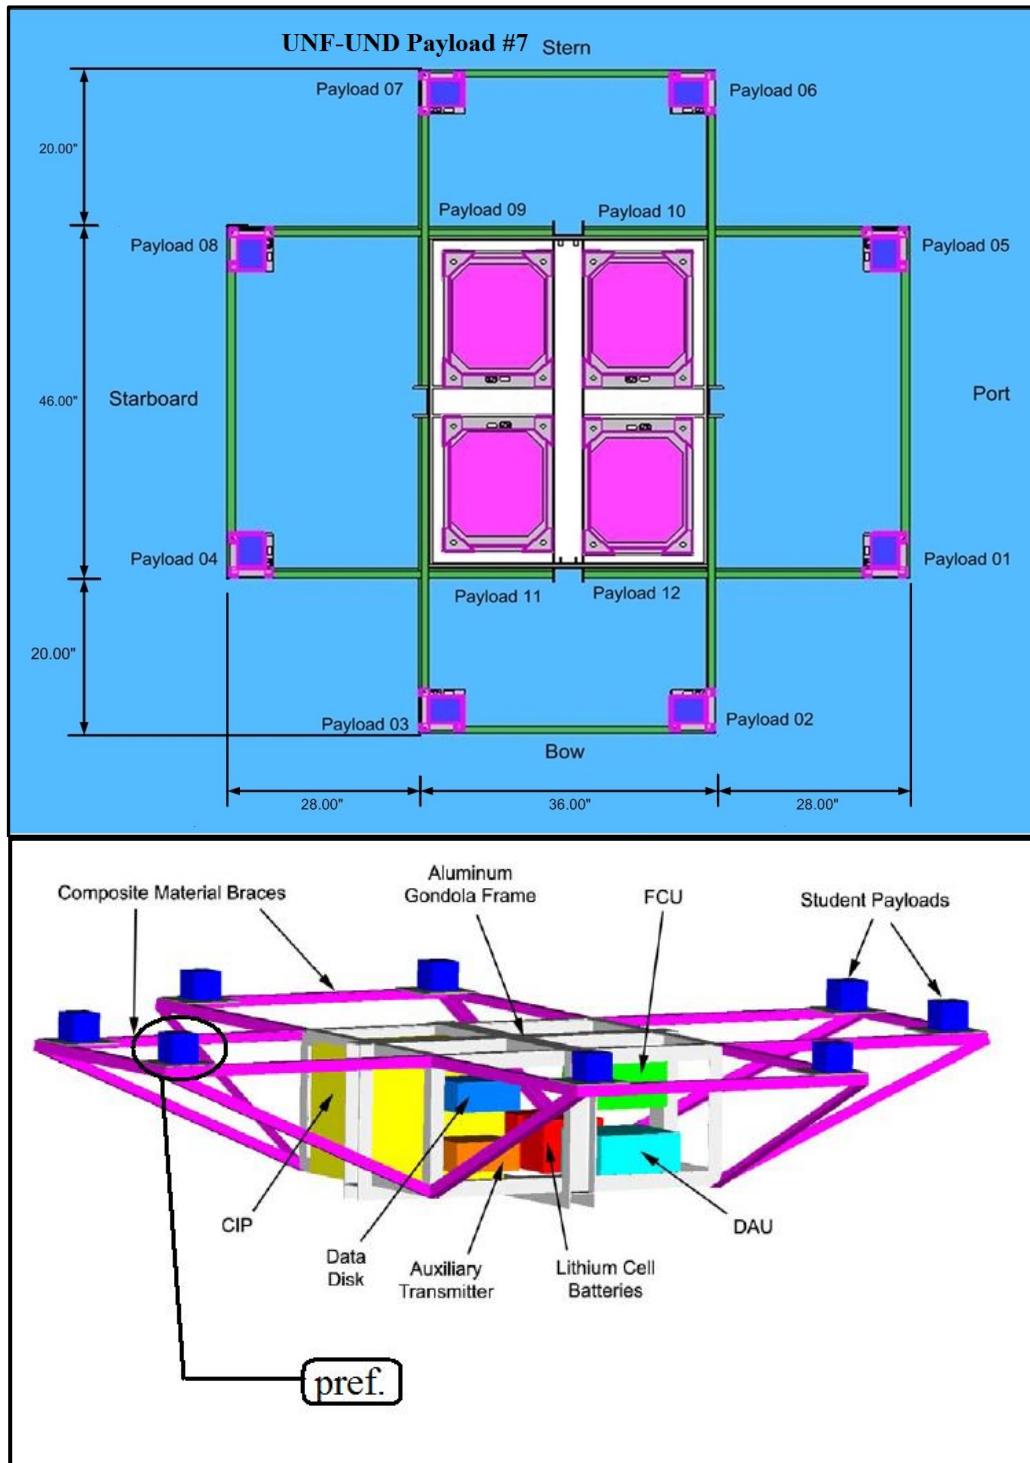


Fig. 6 (a) Top view (b) side view proposed HASP Configuration
Dr. Guzik and Wefel [7]

http://laspace.lsu.edu/hasp/documents/public/HASP_Interface_Manual_v21709.pdf

4. Electronic Circuits

The block diagram of circuit is shown in fig. 7 (a), while several sections of circuits are shown in fig. 7 (b) to (e). Two identical microcontroller PCBs will be fabricated. One PCB will be used for

the payload, while for other PCB will be used to stimulate software and backup. The microcontroller circuit was designed by Jonathan earlier and then redesigned and refabricated by Ken, Brittany and Chris. ***Please excuse us for smaller and lighter fonts in the circuit digram. We will modify it in larger fonts size later on.***

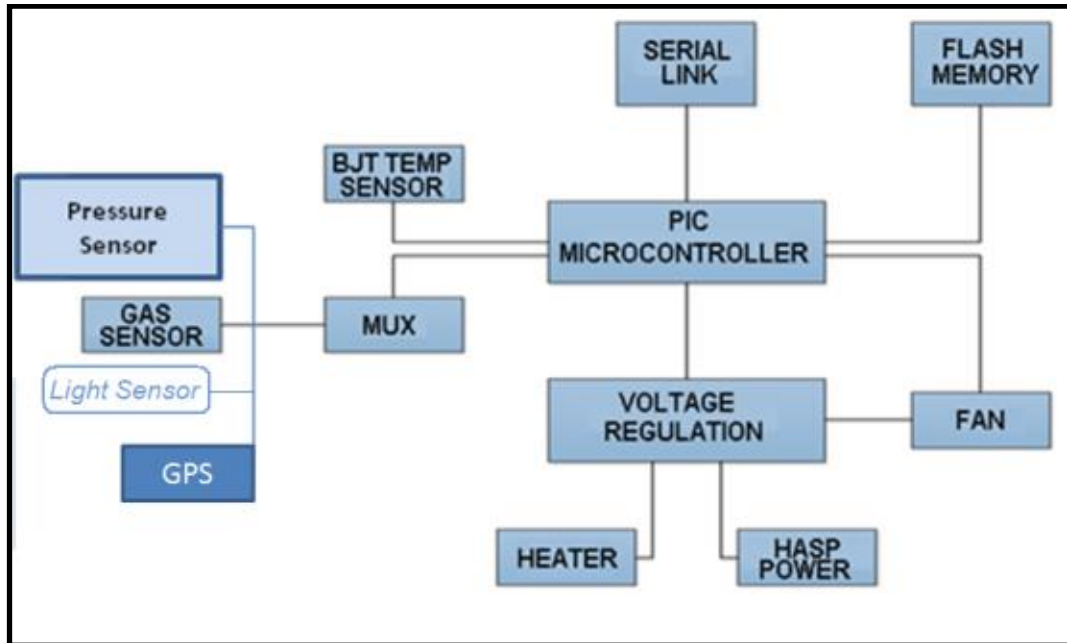


Fig. 7(a) Block diagram of payload circuit

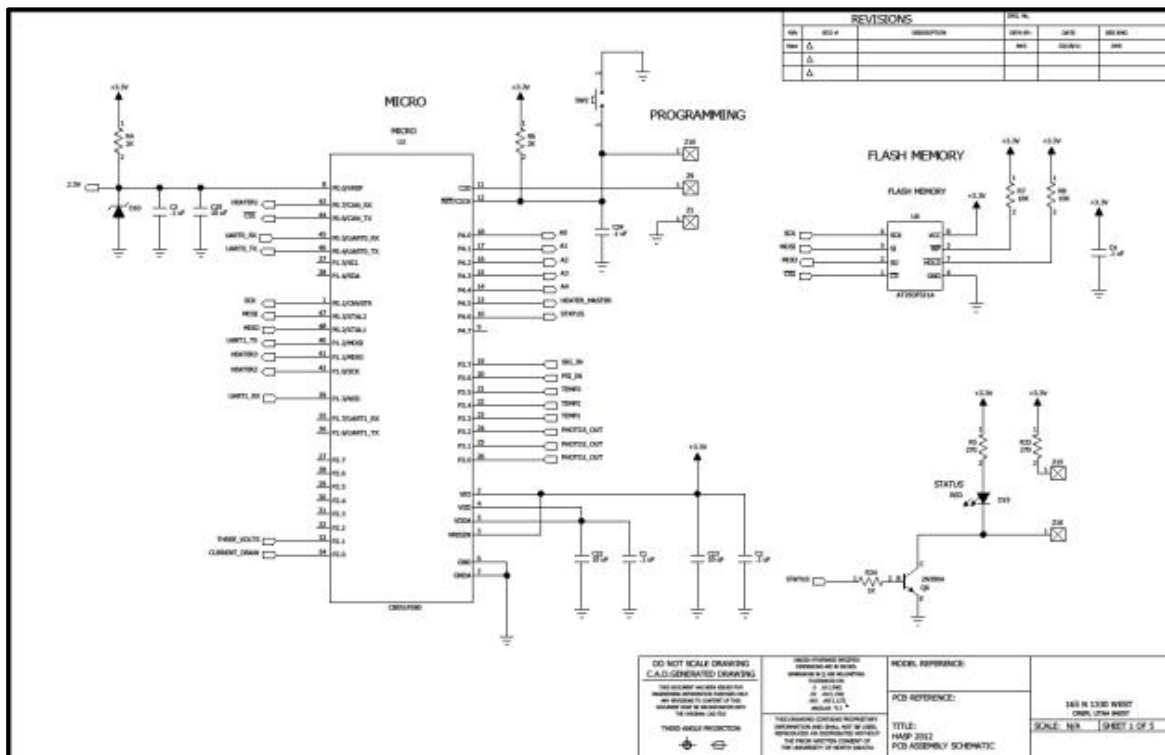


Fig. 7 (b) Circuit for microcontroller and flash memory

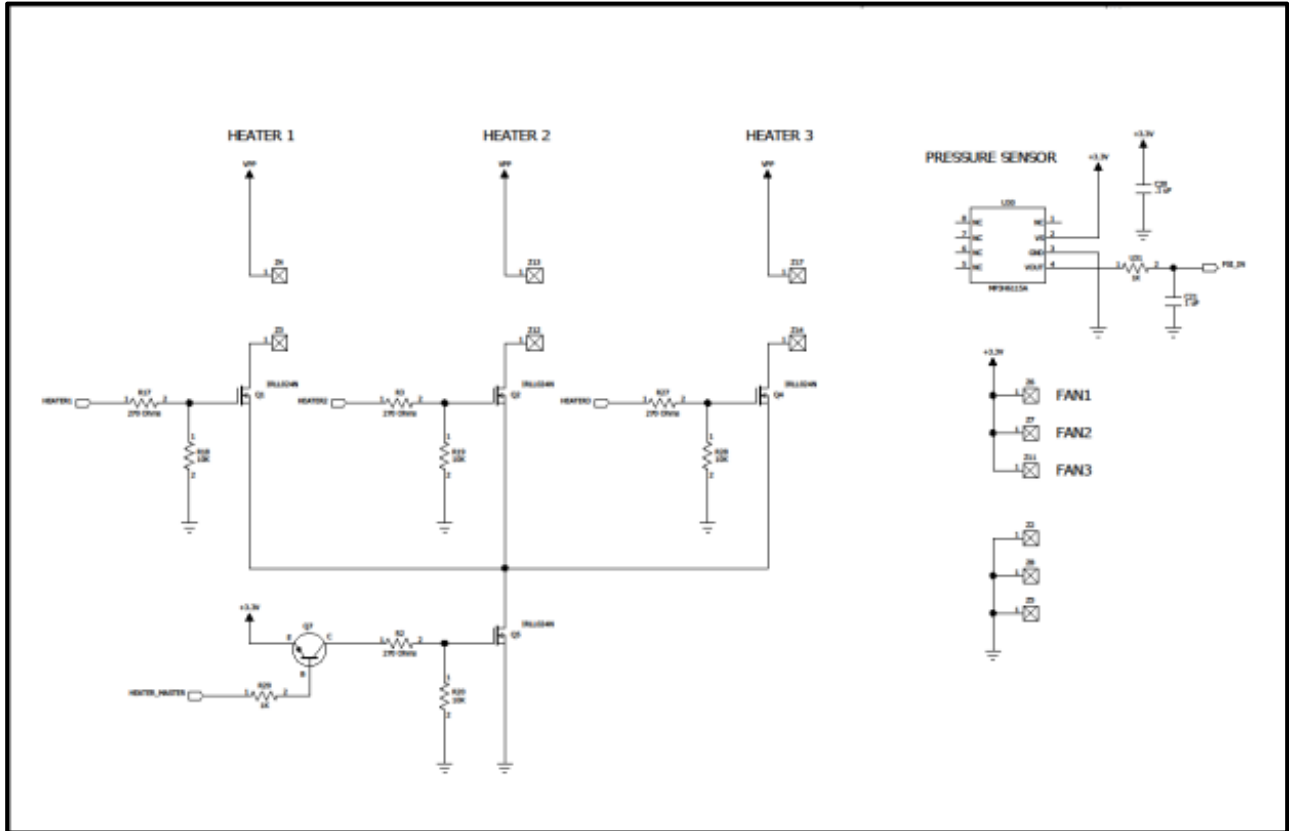


Fig. 7(c) Circuit for three heaters, three fans and pressure sensor

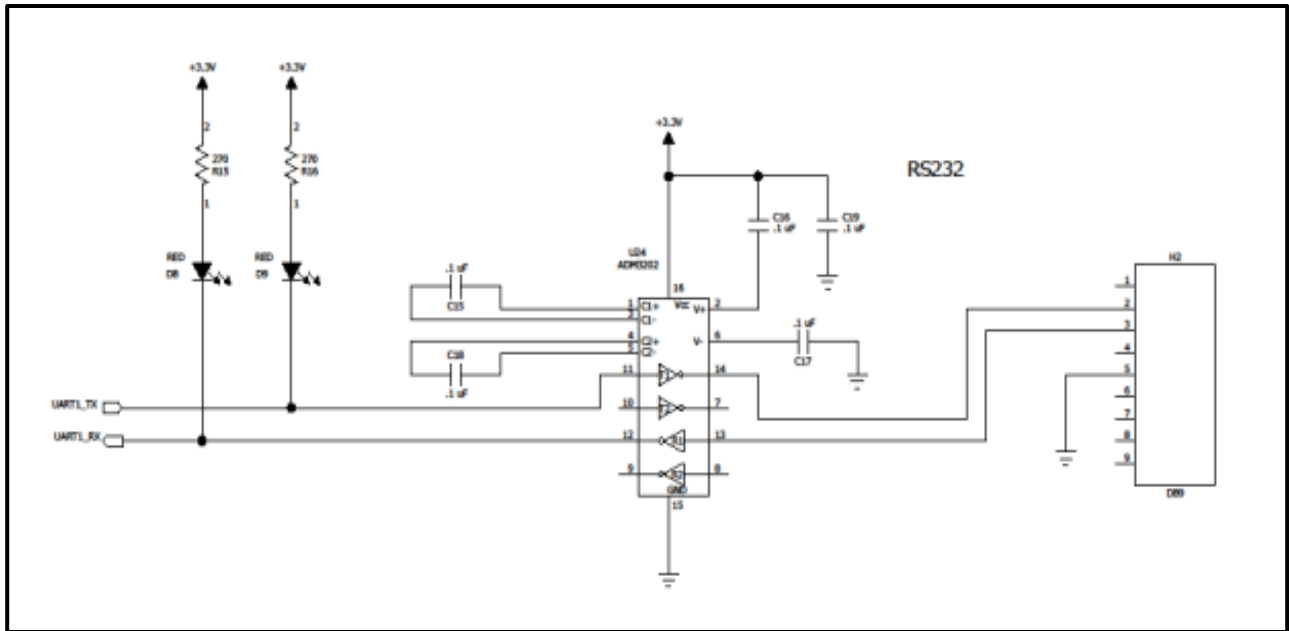


Fig.7 (d) Circuit for RS232

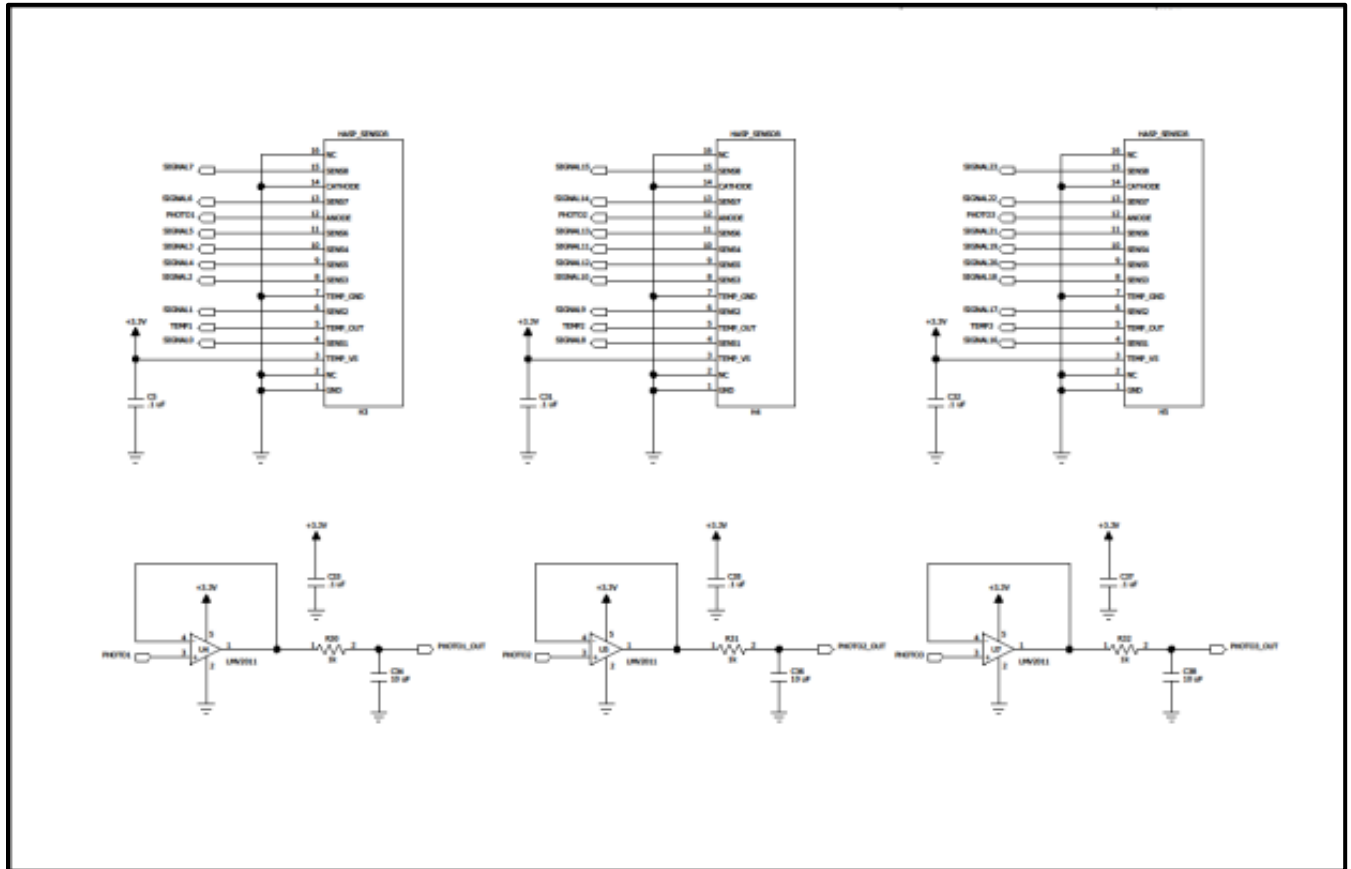


Fig.7 (e) Circuit for three ozone sensors boxes and three photo (UV light) sensors

5. Payload Power Budget

The 0.5Amps at 30VDC power supplied by HASP adequately accommodates the power requirements for the payload electronics, as well as the heater and fan for the sensor. The expected current and power drawn by the payload at 3.3V applied voltage are given in the following table-2.

Table-2 Power budget of the payload

Circuit Function	Current Draw (mA) at 3.3 V	Power (W) draw at 3.3 V
Payload Power ON, ALL heaters OFF	30 ± 5	0.099 ± 0.017
Payload Power ON, ONE heater ON	140 ± 5	0.462 ± 0.017
Payload Power ON, TWO heaters ON	250 ± 5	0.825 ± 0.017
Payload Power ON, Three heaters ON	360 ± 5	1.2 ± 0.017

The minimum power drawn by the payload will be about 0.099 ± 0.017 W, while maximum power drawn will be about 1.2 ± 0.017 W. Most of time power drawn by the payload during the float will be less than 1.0 W. This expected power consumption is less than the 15 W limits for the smaller payloads.

As per the instructions, on the EDAC 516 power connector only pins A,B,C,D are wired to the payload as +30 VDC power supply and pins W,T,U,X are wired to payload as power ground to avoid failure to the power circuit or loss of payload. A voltage regulator is not necessary according to initial tests despite the slightly higher +33 VDC at launch for the sensor; however, a voltage regulator and divider will be used for peripherals. Fig. 8 shows the EDAC516 receptacle pin layout.

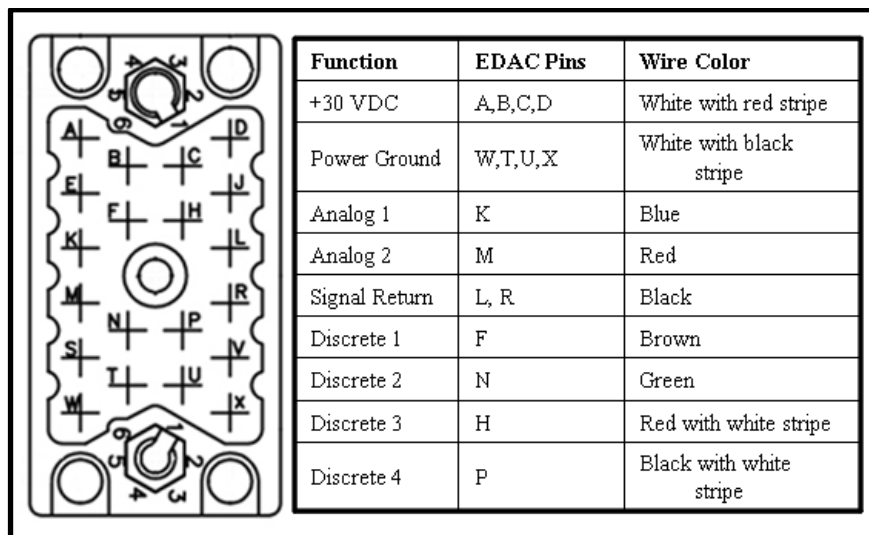


Fig. 8 EDAC516 receptacle pin layout (Courtesy: HASP manual).

HASP will provide power to our payload through EDAC 516 connector. The following fig. 9 shows the circuit diagram for interfacing of HASP mounting plate EDAC 516 connector with voltage regulation of payload subsystems. Below is the switching power supply circuit, which is used in previous payloads. It has performed flawlessly. It is based around a National Semiconductor LM2956-3.3 switcher with ramp up voltage capability provided by C11, R13, and R14. 30 volts from the EDAC connector is provided via its 4 connections to a reverse protection diode, D11. A current limiting resistor, R1, is in series with D11. The 30 volt supply is then reduced to 3.3 volts via the switching power supply U21 and supporting components.

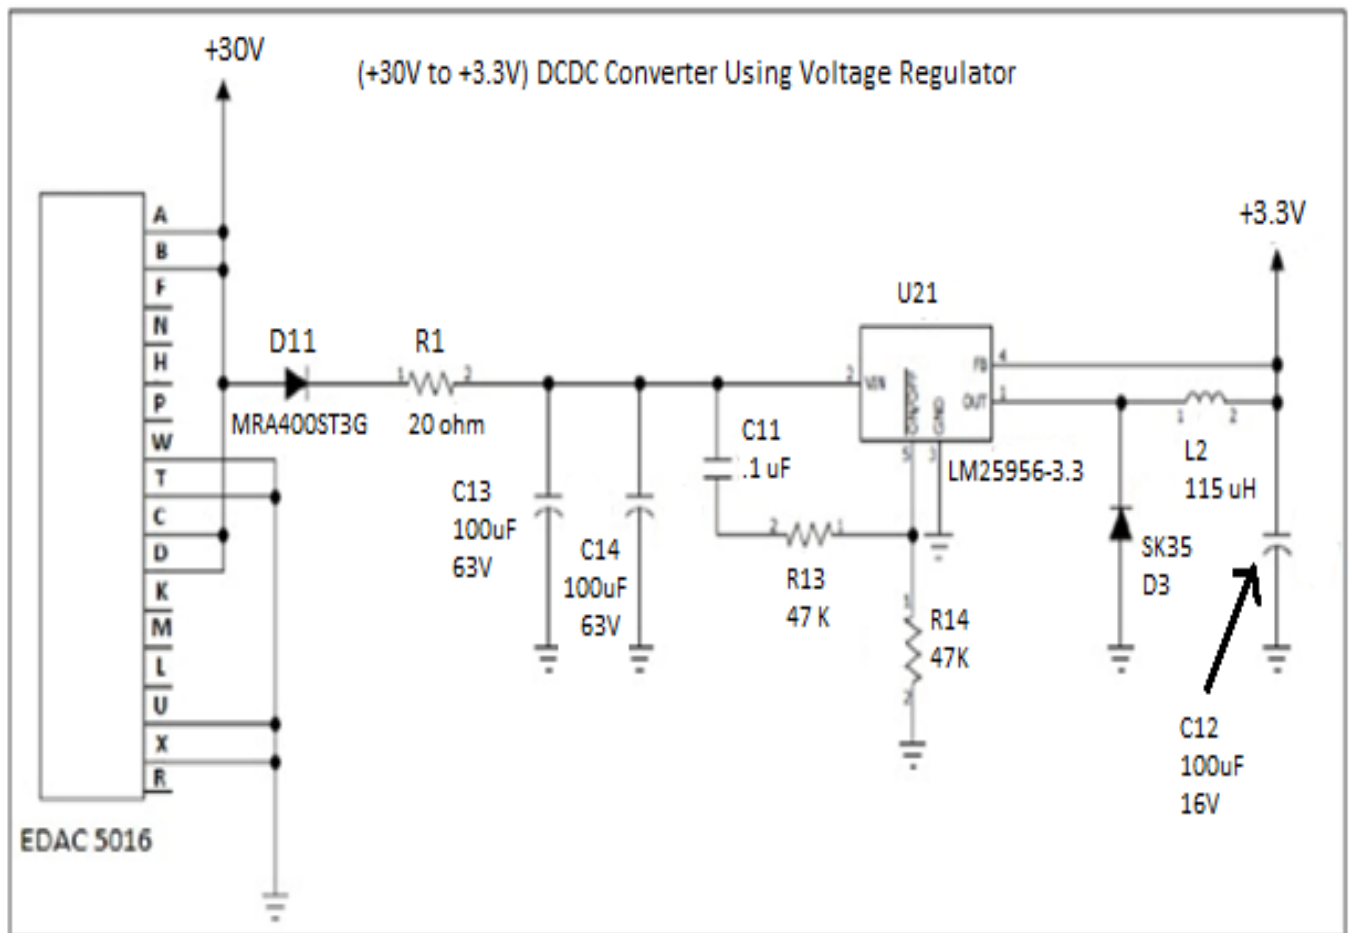


Fig.9 interfacing of EDAC 5016 of mounting plate with the payload voltage regulation circuit

Measured current draw at 3.3 VDC for different function of circuit operation is listed in the table-3.

Table-3 Current Draw by the payload

Circuit Function	Current draw (mA)
Payload Power ON, but all heaters OFF	30±5
Payload Power ON and Heater #1 ON	140±5
Payload Power ON, Heater #1 and 2 ON	250±5
Payload Power ON, Heater #1, 2 and 3 ON	360±5

The voltage applied to the payload during the HASP 2017 flight is shown in fig.10 (a) for information. It was found that applied voltage remain nearly constant about 3300 mV.

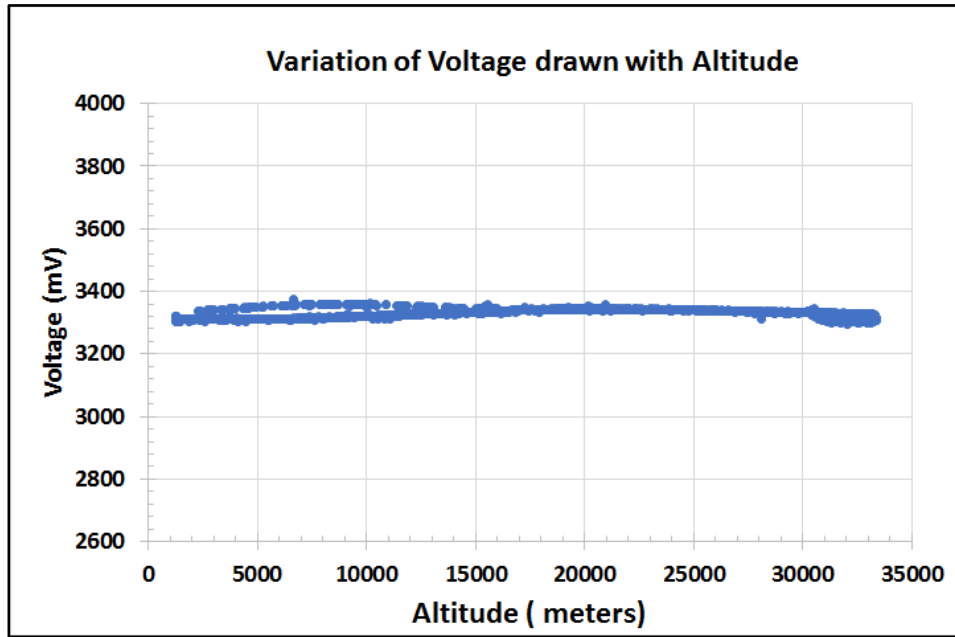


Fig.10 (a) Voltage applied to the payload during the HASP 2017 flight.

The current drawn by the payload during the HASP 2016 flight is shown in fig. 10(b). The current drawn by the payload during the flight was

- (i) About 30 ± 5 mA when all three heaters were off,
- (ii) About 140 ± 10 mA when Heater #1 ON,
- (iii) About 250 ± 10 mA when Heater # 1 and 2 ON and
- (iv) About 360 ± 20 mA when all three heaters were ON.

The power budget was maintained under the upper limit of HASP requirement during the flight.

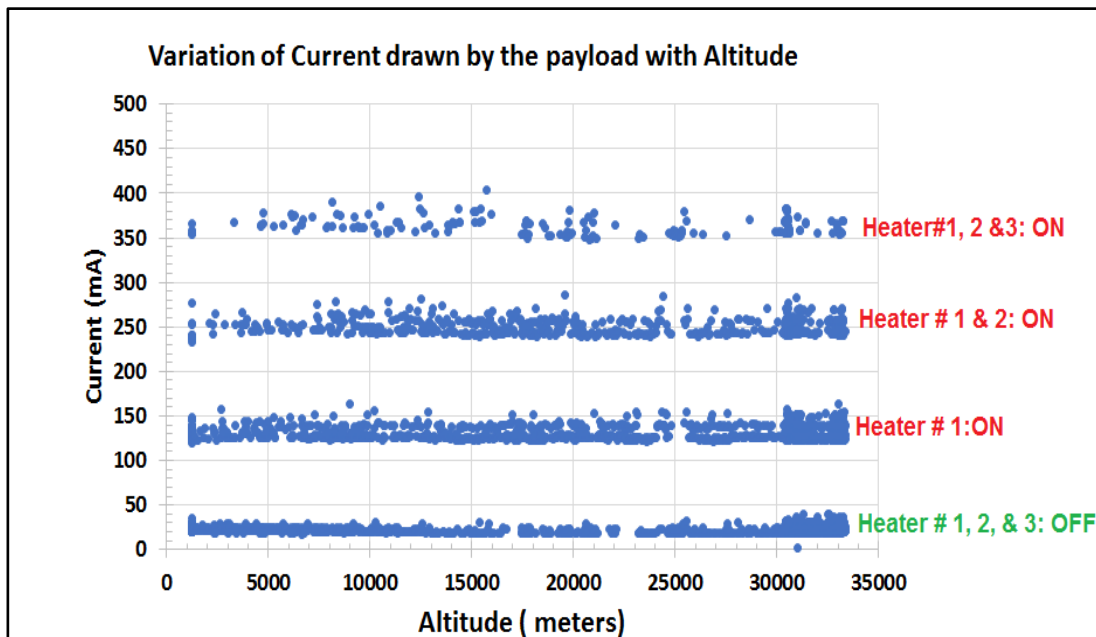


Fig.10 (b) Current drawn by the payload during the HASP 2017 flight

6. Thermal Stability of the Payload

Preliminary heat transfer calculations using equation (1), heat transfer, showed the onboard sensor heater is adequate to keep the sensor at the nominal conditions. An additional exploration of the effects of temperature on component integrity is ongoing, and part of the investigation. These initial estimations utilized the proposed materials for the walls, and a minimum temperature of -60°C ($=333\text{ K}$ or 140°F) and a general operating temperature of 15°C ($=288\text{ K}$ or 59°F) (found from altitude variation from 0 km to 36 km shown in the modified altitude profile (Fig. 11 (a)).

$$\text{Heat Transfer} = q = m(\Delta T) C_p \quad (1)$$

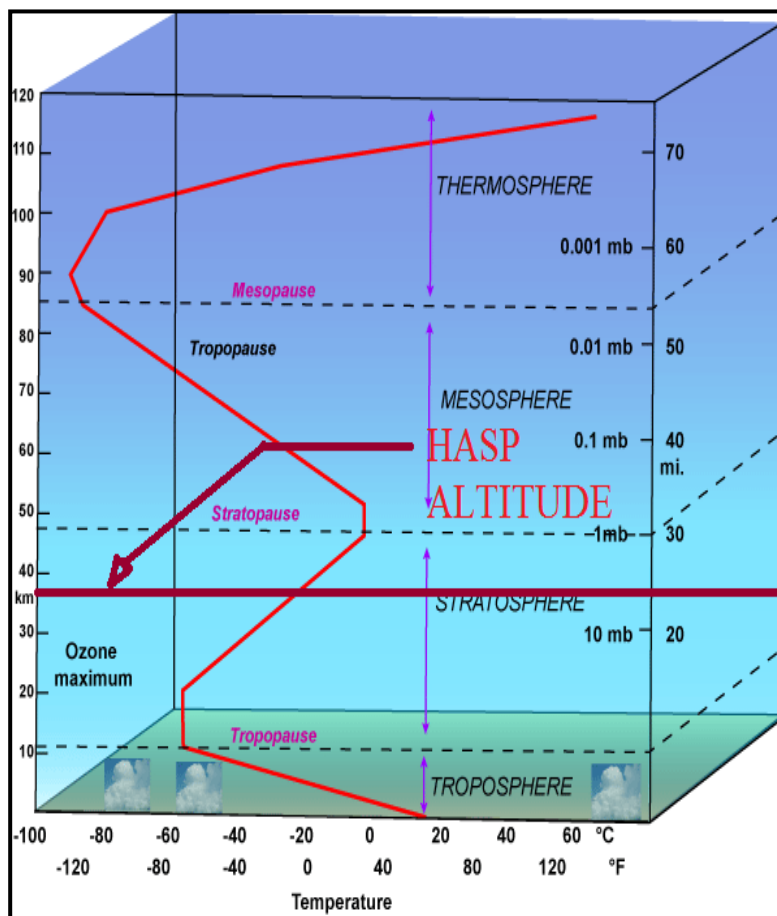


Fig. 11(a) Modified Altitude Profile by Atkins [8]

Our last payload had good thermal stability. We will try to further improve the thermal stability of the payload. As mentioned in our objectives, the outer surface of payload body will be covered by the thermal blanket made of aluminized heat barrier having adhesive backed (Part No. 1828) (Make: www.PegasusAutoRacing.com) for the improvement of thermal stability. The high reflective surface of the material is capable of withstanding radiant temperatures in excess of 1000°C . This thermal blanket will minimize the variation of internal electronics temperature conditions. The

temperature of ozone sensors will be controlled in the range of 302 ± 6 °K using an On-Off controller, a polyimide flexible heater (MINCO make) and a temperature sensor TMP 36). We may replace the aluminum body of payload by fiber glass or carbon composite or alloy body for reducing weight as well as improving thermal stability. The variation of temperature of one of ozone sensors box #1 with altitude during the HASP 2017 flight is shown in fig.11 (b) for information. The temperature of sensors was remaining constant 302 ± 6 °K.

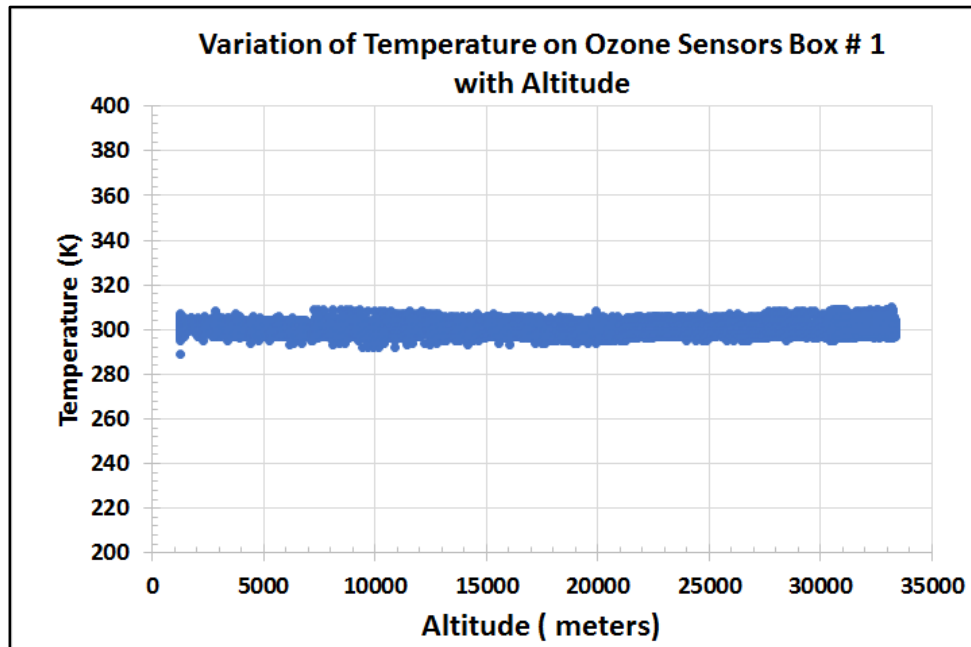


Fig. 11 (b) Temperature of ozone sensors box#1

7. Data Communications

The payload module requires the RS232 HASP telemetry to send the status of resistance vales to the ground. A data-recording unit will be included with master controller on PCB in the event that the telemetry link fails. The DB9 connector (Fig.12 (a)) is required to the HASP system’s telemetry system so that the data can be sent to the base station via the RS232 link. The RS232 link will operate at 2400 baud, with the standard RS232 protocol with eight data bits, no parity, one stop bit, and no flow control. A standard packet will contain the information-formatted vis-à-vis the Student Payload Serial Connection section of the HASP-Student Interface Document.

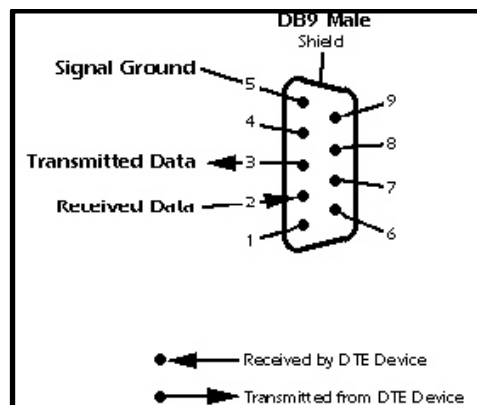


Fig. 12 (a) DB9 pin diagram (Courtesy: HASP manual)

Downlink Telemetry Specifications

- (a) Serial data downlink format:
Packetized- Record +/- 232 bytes transmitting in 5 second intervals
- (b) Approximate serial downlink rate: 372 bps
- (c) Table-4 shows the information about serial data record including record length and information contained in each record byte. Total record length : 238 bytes

Table-4 Data record length

Byte #	Description	Example	Units
1 - 4	Packet Sync	HASP	n/a
5 - 8	GPS Source	XGPS	n/a
9 - 23	Time stamp	,1407604205.265	sec
24 - 29	Altitude	,38044	m
30 - 35	Sensor 1-1	,01067	ohms
36 - 41	Sensor 1-2	,01390	ohms
42 - 47	Sensor 1-3	,01438	ohms
48 - 53	Sensor 1-4	,01248	ohms
54 - 59	Sensor 1-5	,01282	ohms
60 - 65	Sensor 1-6	,01450	ohms
66 - 71	Sensor 1-7	,01358	ohms
72 - 77	Sensor 1-8	,01060	ohms
78 - 83	Sensor 2-1	,01623	ohms
84 - 89	Sensor 2-2	,02874	ohms
90 - 95	Sensor 2-3	,02999	ohms
96 - 101	Sensor 2-4	,01820	ohms
102 - 107	Sensor 2-5	,01993	ohms
108 - 113	Sensor 2-6	,02956	ohms
114 - 119	Sensor 2-7	,02812	ohms
120 - 125	Sensor 2-8	,01371	ohms
126 - 131	Sensor 3-1	,01495	ohms
132 - 137	Sensor 3-2	,01652	ohms
138 - 143	Sensor 3-3	,01669	ohms
144 - 149	Sensor 3-4	,01748	ohms
150 - 155	Sensor 3-5	,01720	ohms
156 - 161	Sensor 3-6	,01619	ohms
162 - 167	Sensor 3-7	,01506	ohms
168 - 173	Sensor 3-8	,01441	ohms
174 - 179	Temp 1	,00298	K
180 - 185	Temp 2	,00309	K
186 - 191	Temp 3	,00297	K
192 - 197	Photovoltage 1	,00460	mV
198 - 203	Photovoltage 2	,00464	mV
204 - 209	Photovoltage 3	,00467	mV
210 - 215	CPU Temp	,00304	K
216 - 221	Power Rail Voltage	,03317	mV
222 - 227	Power Rail Current	,00148	mA
228 - 233	Pressure	,00117	mBar
234 - 238	Heater Status	,1101	n/a

The standard RS-232 connectivity rate for a small payload is 1200 baud. We will certainly try to remain within the limit this time by improving our software program and hardware.

- (d) Number of analog channels being used: 0
- (e) Number of discrete lines being used: 0
- (f) Are there any on-board transmitters? If so, list the frequencies being used and the transmitted power. We will update this information to Dr. Guzik, if we will able to add it.
- (g) Other relevant downlink telemetry information. Not Applicable

Uplink Commanding Specifications

- (h) Command uplink capability required: Yes
- (i) If so, will commands be uplinked in regular intervals: No
- (j) How many commands do you expect to uplink during the flight (can be an absolute number or a rate, i.e. *n commands per hour*): 1 command per hour maximum
- (k) Provide a table of all of the commands that you will be up linking to your payload

The proposed commands are mentioned in the table-5 (a) and (b). Any changes in the list will be updated at the time of PSIP and FLOP.

Table 5 (a): List of Commands in general

#	Command Description	Cmd. Code	Checksum	Confirmation/Notes
1	Reset	0x71	0x31	"HELLO" upon reset
2	Erase data in flash	0x72	0x32	"ERASING FLASH"... " COMPLETE"
3	Upload data in flash	0x73	0x33	"NO DATA"
4	n/a	n/a	n/a	n/a
5	Master Heater Override Switch On	0x75	0x35	Heater Status (default)
6	Master Heater Override Switch Off	0x76	0x36	Heater Status
7	On Board Data Logging On	0x77	0x37	Data (default)
8	On Board Data Logging Paused	0x78	0x38	Data empty
9	Stream UNF GPS data	0x79	0x39	"UGPS"
10	Stream HASP GPS data	0x7A	0x3A	"HGPS"

Table 5 (b) List of Uplink Commands

Command	Hex Code	Description	Importance
RESET	7131	Reset System	Critical
HEATER OVERRIDE_ON	7535	Turn Master Heater Switch Off. The main heater switch is disabled so no individual heaters will be able to turn ON.	Critical
HEATER OVERRIDE_OFF	7636	Turn Master Heater Switch On (default). The main heater switch is enabled and thus each individual heater can turn ON or OFF as needed by the temperature controller.	Critical
UBLOX_STREAM	7939	Stream GPS via Embedded GPS (default)	Critical
HASP_STREAM	7A3A	Stream GPS via HASP GPS	Critical

- (l) Are there any on-board receivers? If so, list the frequencies being used. No.
- (m) Other relevant uplink commanding information. None
- (n) UNF-UND Team may request the HASP to provide us the GPS strings from the HASP gondola every 1 second in case of failure of our payload GPS.
- (o) Payload will not contain any radioactivity materials or plants or animal or bacteria.**
- (p) Define a successful integration of your payload:

Payload successfully mounts to platform, both mechanically and electronically. Payload successfully performs a sensor/communication check, and systems health checks to ensure proper data/headers formatting. After an initial test sequences a steady 1 Hz flashing STATUS LED indicates a sound system. After initial system testing is complete the system will successfully packet and send data to HASP computer and ground station computer will decipher and provides data plots of ozone concentration in real-time during the final preflight testing (the thermal vacuum testing).

(q) List all expected integration steps:

- a) Successfully interface the payload to platform.
- b) Mount the payload to the HASP platform
- c) Connect and interface the payload with the power system and the communication bus of HASP as shown in fig. 12 (b).

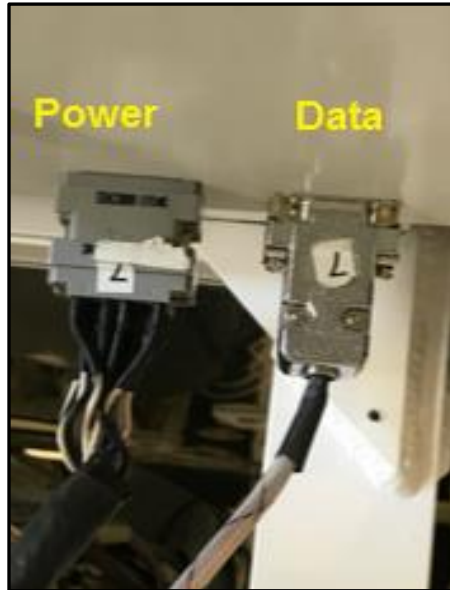


Fig. 12 (b) Connection of power and data communication cables of HASP with the payload (#7).

(r) List all checks that will determine a successful integration:

- a) Perform communication and data checks.
- b) Successfully execute command set.
- c) Monitor system to ensure proper operation via real time data stream of all sensors data readings, pressure, photo voltage of light sensors and ambient temperature.

8. Steps for Measurements of Ozone

Fig. 13(a) shows various steps for the detection of ozone by the sensors payload during the flight. The detection of reducing gases will also have similar steps.

Team has also developed the program for testing the HASP payload. The different style of screens for quick monitoring data directly from the LSU website server can be possible. This LabVIEW based program will save time to download the files and then apply software program to put data in EXCEL and then make plots. This will help us monitoring data easily during the thermal vacuum test as well as during the flight. One of screen picture is shown in fig.13 (b).

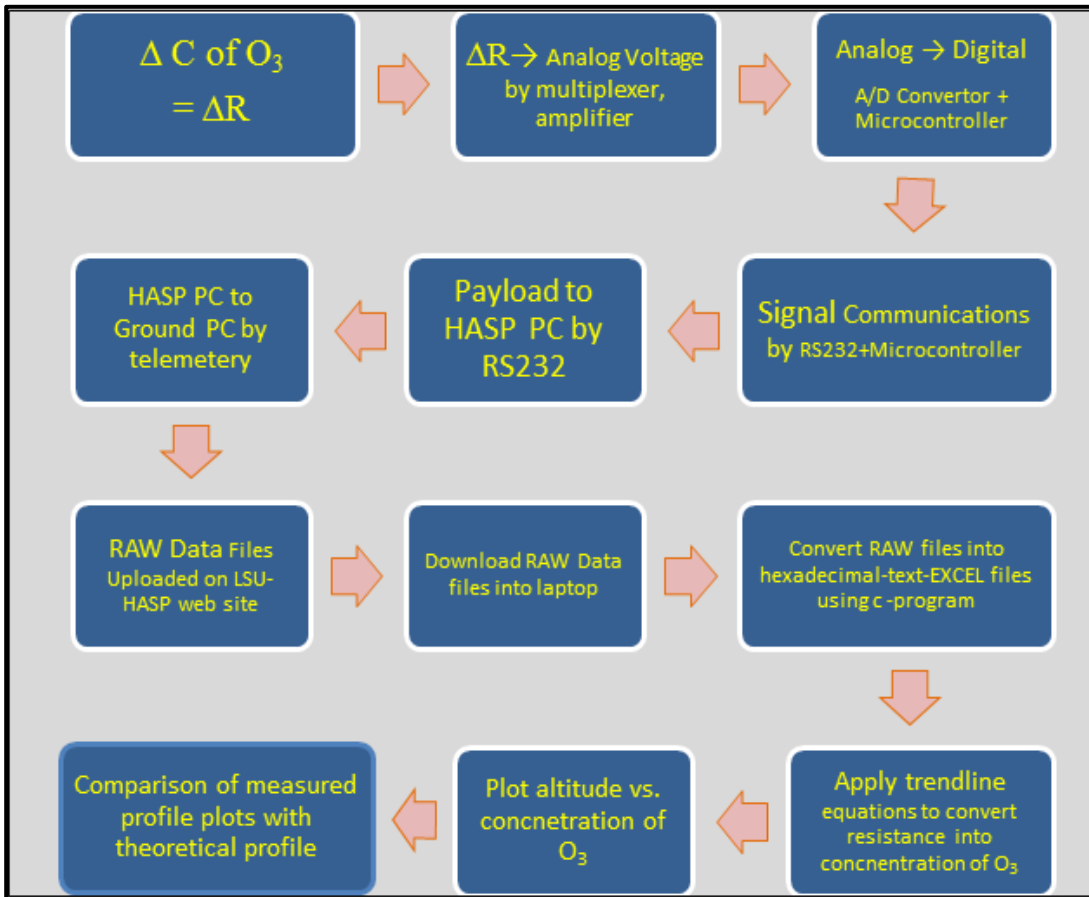


Fig.13(a) Steps for the detection of ozone by the payload

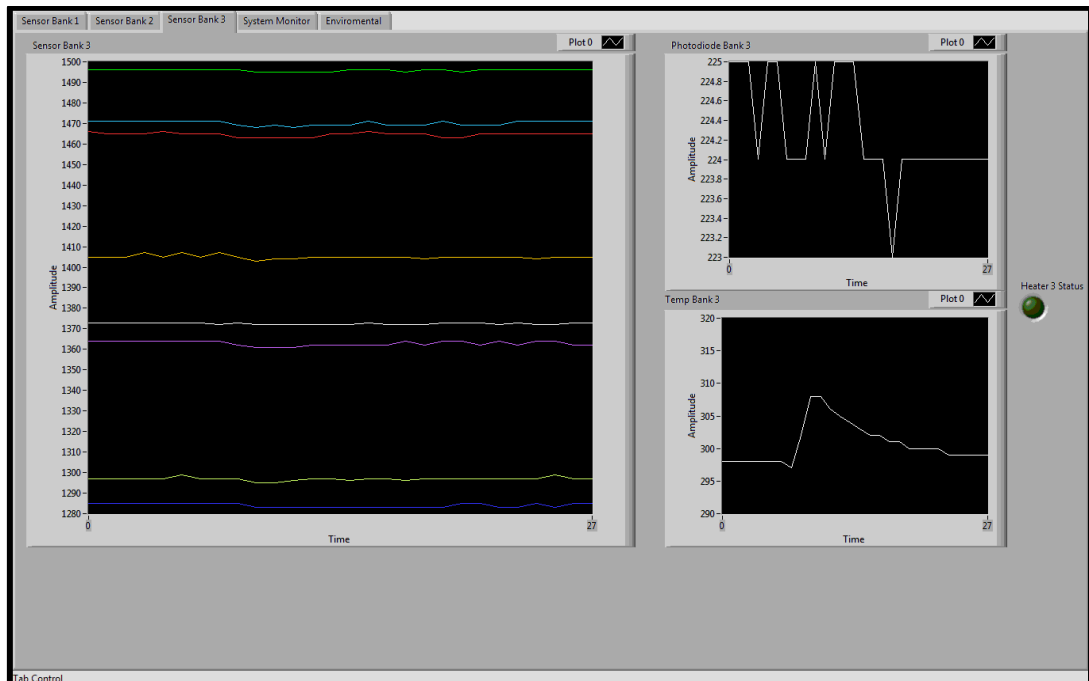


Fig.13 (b) Screen picture of data monitoring.

9. UNF and UND Team and Demographic Information

Fig.14 shows the chart for the team management. The listed work distribution is tentative, which will be organized further after making joint tele or video conference in January 2018.

HASP 2018	
UNF	UND
Dr. Nirmal Patel UNF Faculty Advisor	Dr. Ron Fevig UND Faculty Advisor
Jesse Lard (Team Leader) Administration, reporting, meeting, Sensors fabrication	Denise Buckner Space Science, payload, and hardware
Zachary Taylor PCB Fabrication, testing, hardware and software	Fnu Anamika* Space Science, Sensors testing, payload, and hardware
Corrina Yorke Cell: 386-697-4971 Payload body design, fabrication and integration	Peter Henson Space Science, payload testing, and software
Devon Cox Payload body fabrication Payload testing and Data Analysis	

Note: Fnu Anamika is a citizen of India, while all other students and faculty advisor of UNF and UND team are the citizens of U.S.A.

Fig.14 UNF-UND team

Faculty Advisors

Both Dr. Nirmal Patel (Faculty Advisor from UNF) and Dr. Ron Fevig (Faculty Advisor from UND) are involving in the development of sensors payload and participated HASP balloon flight since 2008. Both were jointly conducted teleconference, face time conference on cell phones, email communications with their team members regularly every month for the previous flights. This will be continuing for HASP 2018. Dr. Patel is mentoring students for the fabrication, testing and calibrations of nanocrystalline gas sensors, design and fabrication of payload, data analysis and improvement of software program, while Dr. Fevig is mentoring students for the improvement of microcontroller circuits, interfacing of sensors, atmospheric studies, and space applications.

Demographic Information of Students

Jesse Lard (UNF) worked as an active participant during HASP 2016 and 2017. He will work as a team leader. He will take organize the meetings and teleconference meetings with all members and faculty advisors, and communicating with the HASP. He will take lead for the integration and thermal vacuum testing of payload at Palestine, TX and pre-flight testing at Fort Sumner, NM. He will also responsible for the flight operation plan, monthly reports, and updating of progress of work and any

issue to both the advisors and for the final science report. The demographic information of all students is given in table-6.

Table-6 Demographic information of students

#	Name	Gender	Ethnicity	Race	Student Status	Disability
University of North Florida Students Team						
1	Jesse Lard Cell: 850-348-3510 jesselard@gmail.com	Male	Non-Hispanic	Caucasian/White	UG-Mechanical	No
2	Zachary Taylor Cell: 315-408-3564 N01385701@ospreys.unf.edu	Male	Non-Hispanic	Caucasian/White	UG-Electrical	No
3	Corrina Yorke Cell: 386-697-4971 corrieyorke@gmail.com	Female	Non-Hispanic	Caucasian/White	UG-Mechanical	No
4	Devon Cox Cell: 904-802-9771 Cox.devon.001@gmail.com	Male	Non-Hispanic	Caucasian/White	UG-Physics	No
University of North Dakota Student						
1	Denise Buckner Cell:314-913-0738 Denise.buckner@und.edu	Female	Non-Hispanic	Caucasian/White	G-Space Studies	No
2	Fnu Anamika* Cell: 701-732-0697 anamika@und.edu	Female	Non-Hispanic	Asian-India	G-Space Studies	No
3	Peter Henson Cell:701-412-5642 Peter.henson@und.edu	Male	Non-Hispanic	Caucasian/White	G-Space Studies	No

10. Task and Work Plan Path

The initial work breaks down schedule includes the basic tasks required of the HASP project, which includes the Proposal, Integration Plan, Integration Certification, Operation Plan, and Science Report. The proposed work plan path is table-7.

Table-7 Work plan path

2018	UNF	UND
January	Conceptual Design Review (CoDR) for sensors, electronic circuits, software and payload. Reviewing science reports and issues of HASP2008 to 2017flights.	
February	Preliminary Design Review (PDR) for sensors, electronic circuits, software, payload, integration of payload with HASP and data analysis.	
March	Critical Design Review (CDR) for sensors, electronic circuits, software, payload, integration of payload with HASP and data analysis.	
April	Designing of circuit board and programming. Fabrication and testing of sensor arrays, designing of payload body	
May	Fabrication of circuit board and programming, modifications, if any Calibration of sensors and delivery of sensor arrays to UND for testing	
June	Fabrication of sensors box and payload body. Reviewing HASP flights, data and any issues.	Testing of Radio, circuit and sensor arrays (if available). Integrating the circuits and the sensor arrays
July	Integration of circuit board and sensor box with the payload body. Development of protocols for communication of payload with HASP computer and RAW files to EXCEL file Integration of sensor arrays in box. Integration of sensor boxes with payload body. Integration of PCB to payload and sensors box.	
August	Performing several tests on the payload at UNF. Flight operation plan, Testing payload, thermal vacuum test of payload and integration of payload with HASP platform	
September	Pre-flight testing of payload, launching of payload and downloading data files, and data analysis work	
October	Payload recovery, testing of sensor arrays and other components, SEM+EDAX analysis of sensor arrays and shorting of issues and failure analysis. Data analysis.	
November	Data analysis and writing science report	
December	Submission of the science report and planning for the next flight.	

11. HASP Integration and Launch

It is expected that at least three students from UNF, one or two students from UND and Dr. Nirmal Patel, faculty advisor from UNF will travel to CSBF, Palestine, Texas in first week of August of 2018 (as per the date given by HASP) for the integration of the sensor payload onto HASP. It is also expected that approximately two students from UNF and UND and one faculty member (UNF or UND) will travel to Ft. Sumner, NM for launch of the HASP2018 payload during September 2018 (as per the date given by HASP and CSBF).

12. Anticipated Procedures

Prior to Integration:

- Testing and Calibration of sensor arrays
- Set initial values for data recorder
- Place sensor arrays in appropriate payload slots
- Check program and LED for status

Integration:

- Mount payload module to HASP
- Connect HASP Power Connector
- Connect HASP Serial Connection
- Test system by recording initial readings and making sure all data is nominal
- Troubleshoot

Pre-Flight Operations and testing:

- Set initial values for data recorder
- Place sensors in appropriate payload slots
- Remove the protecting cover from the payload body
- Connect HASP Power Connector
- Connect HASP Serial Connection
- Check mass and size of payload
- Test thermal-low temperature and high temperature test and also all commands
- Test pressure and vacuum test
- Test 10g vertical and 3g horizontal vibration/impact test

Duration of Flight:

We are flexible for the duration of flight. Minimum 6 to 8 hours flight during **day time** will be fine for us.

Flight Operations:

- Record values for resistance across the sensors

Post-Flight Operations:

- Examine all parts of payload. Test working of the payload.
- Remove PCB and sensors box from the payload. Test PCB with power and test sensor box
- Examine sensors box for electrical testing, SEM+EDAX analysis, and determine failure analysis, if any.

13. Financial Considerations

UND will seek funding through the North Dakota Space Grant Consortium. UNF will request the Florida Space Grant Consortium for the funding for the students' support, travel and consumables.

14. References

- [1] Perry J. Samson, "Nocturnal Ozone Maxima"
Atmospheric Environment, Vol.12 (1978) 951-955.
- [2] A. Mavrakis, H. Flocas, E. Mavromatidis, G. Kallos, G. Theoharatos and A. Christides, "A Case of Nighttime High Ozone Concentration over the Greater Athens Area", Meteorologische Zeitschrift, Vol. 19, No.1 (2010) 035-045.
- [3] R. San Jose, A. Stohl, K. Karatzas, T. Bohler, P. James and J.L. Perez, "A Modelling Study of an Extraordinary Night Time Ozone Episode over Madrid Domain". Environmental Modelling & Software 20 (2005) 587-593.
- [4] Solid-State Sensors Behavior in Reduced Pressure Environments Demonstration Using an Experimental Indium Tin Oxide Ozone Gas Sensors for Ozone Sounding; Nathan Ambler, Ronald Fevig and Nirmal Patel, Proceedings of 59th International Astronautical Congress, Glasgow, (Sept 29-Oct 3, 2008), C2.I.17
- [5] Hansford, Graeme M., et al. "A low cost instrument based on a solid state sensor for balloon-borne atmospheric O₃ profile sounding." Journal Environmental Monitoring (2005): 158-162.
- [6] HASP – Student Payload Interface Manual, Version 02.17.9
http://laspace.lsu.edu/hasp/documents/public/HASP_Interface_Manual_v21709.pdf
- [7] Guzik, T. Gregory and John P. Wefel. "The High Altitude Student Platform (HASP) for Student-Built Payloads." 35th COSPAR Scientific Assembly. Houston, Texas, 2004. 1-8.
- [8] Atkins, Noel. Survey of Meteorology. 10 November 2007
http://apollo.lsc.vsc.edu/classes/met130/notes/chapter1/vert_temp_all.html
-